



7

Needle roller bearings



7 Needle roller bearings

More information

General bearing knowledge	17
Bearing selection process	59
Lubrication	109
Bearing interfaces	139
Selecting internal clearance	182
Sealing, mounting and dismounting	193

SKF needle roller bearings are bearings with cylindrical rollers that are small in diameter relative to their length. The modified roller/raceway profile prevents stress peaks to extend bearing service life.

SKF supplies needle roller bearings in many different designs, series and in a wide range of sizes, which make them appropriate for a wide variety of operating conditions and applications.

Bearing features

• Low cross section

In applications where less space is available, needle roller bearings offer a very compact solution ([fig. 1](#)), and drawn cup needle roller bearings enable downsizing.

• High load carrying capacity

Owing to their large number of rollers, needle roller bearings have a high load carrying capacity.

• High stiffness

Because of their large number of small-diameter rollers, needle roller bearings have high stiffness.

• Separable design

The possibility of assembling inner and outer rings separately permits interference fits for shaft and housing and also enables easy maintenance inspections ([fig. 2](#)).

• Accommodate axial displacement

Except for bearings with langes on both the inner and outer rings, needle roller bearings with machined rings can accommodate axial displacement ([fig. 3](#)).

• Accommodate static misalignment

Alignment needle roller bearings are self-aligning up to 3° of static misalignment.

• Locating bearing arrangement

Combined needle roller bearings accommodate combined radial and axial loads in one or both directions.

Fig. 1

Low cross section





Fig. 2

Separable design



Designs and variants

Needle roller and cage assemblies



SKF needle roller and cage assemblies are self-contained, ready-to-mount bearings. In applications where the shaft and housing bore can serve as raceways, the assemblies can be used to create bearing arrangements that require minimal radial space.

Basic design bearings

- are identified by the series designation K
- are available as (fig. 4):
 - single row design (no designation suffix)
 - double row design (designation suffix ZW)

They are characterized by the following properties:

- simple to mount and robust
- accurate roller guidance in the cage pockets
- good running performance

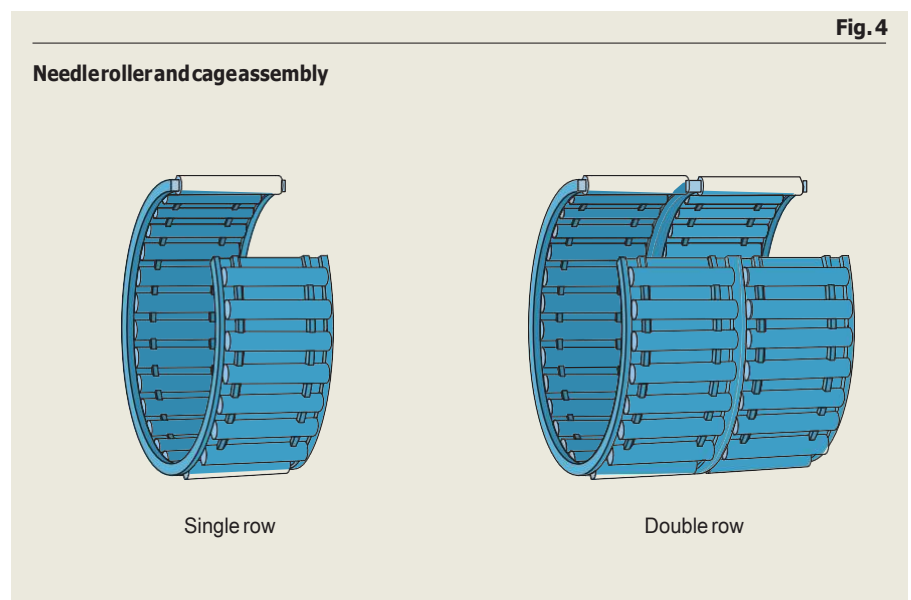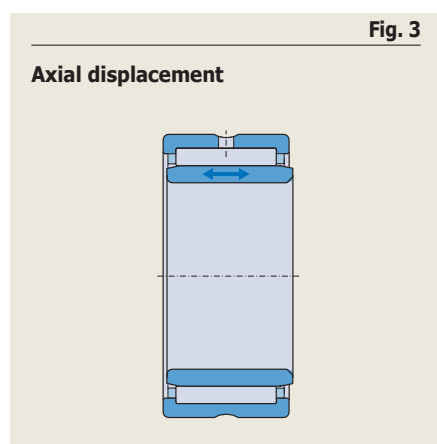

Other needle roller and cage assemblies

Needle roller and cage assemblies with a split cage can be used where raceways are recessed in the shaft ([fig. 5](#))

Special needle roller and cage assemblies are used for the gudgeon (wrist) pin ([fig. 6](#)) and crankpin (crankshaft journal) ([fig. 7](#)) for connecting rods of internal combustion engines and compressors. They provide excellent service in spite of rapid accelerations, elevated temperatures, unfavourable load, and poor lubrication conditions.

For additional information about special sizes and designs, which are available on request, contact SKF.

Drawn cup needle roller bearings

SKF drawn cup needle roller bearings have a deep drawn, thin-walled outer ring. Drawn cup needle roller bearings are typically used in applications where the housing bore cannot be used as a raceway for a needle roller and cage assembly, but where a very compact and economical bearing arrangement is required. These bearings are mounted with a tight interference fit in the housing. This enables a simple and economic design of the housing bore, as shoulders or snap rings are not required to locate the bearing axially.

The drawn cup of hardened steel and the needle roller and cage assembly of these bearings form a non-separable unit.

SKF standard assortment

SKF supplies a wide assortment of drawn cup needle roller bearings. This includes:

- bearings with open ends ([fig. 8](#))
- bearings with a closed end ([fig. 9](#))
- full complement bearings with open ends ([fig. 10](#))

SKF drawn cup needle roller bearings:

- are supplied without an inner ring
- are generally designed with one needle roller and cage assembly – except wide sizes, which incorporate two needle roller and cage assemblies immediately adjacent to each other, with a lubrication hole in the outer ring ([fig. 11](#))

Fig. 5

Needle roller and cage assemblies with a split cage

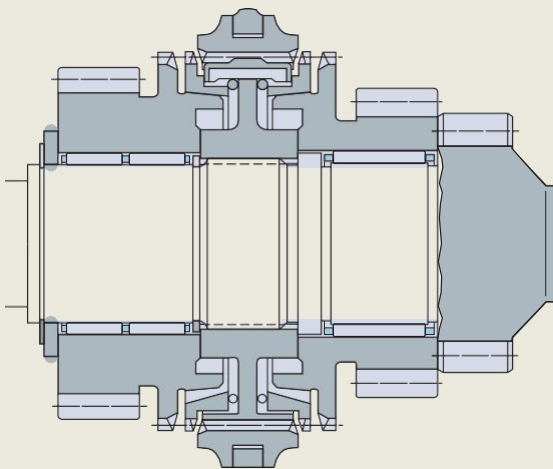


Fig. 6

Special needle roller and cage assembly for the gudgeon (wrist) pin


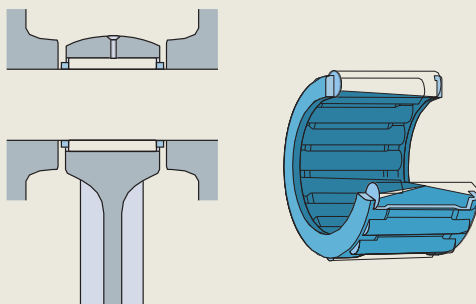


Fig. 7

Special needle roller and cage assembly for the crankpin (crankshaft journal)

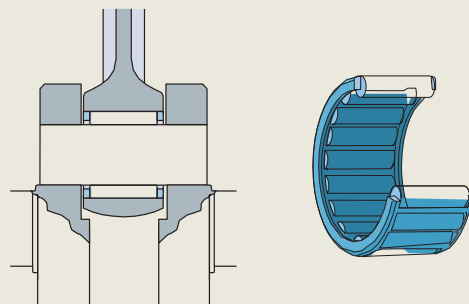


Basic design bearings

- **Drawn cup needle roller bearings with open ends** (series designation HK, [fig. 8](#))
 - are available open (without seals) or sealed on one or both sides (Sealing solutions, [page 594](#))
- **Drawn cup needle roller bearings with a closed end** (series designation BK, [fig. 9](#))
 - are available open or sealed (Sealing solutions)
 - are suitable for bearing arrangements where they are situated at the end of a shaft
 - accommodate small axial guidance forces, because of the proiled design of their closed end

- **Full complement bearings with open ends** (series designation HN, [fig. 10](#))
 - are suitable for very heavy radial loads at moderate speeds
 - are available with open ends and without seals only


Full complement drawn cup needle roller bearings are supplied with a special grease to secure the rollers during transport. However, SKF recommends relubricating after mounting. Depending on the required grade, SKF recommends SKF LGEP 2 or SKF LGWM 1 grease for relubrication. The technical specifications of the initial grease and the relubrication greases are listed in [table 1](#).

Fig. 8
Drawn cup needle roller bearing with open ends




HK

Fig. 10
Full complement drawn cup needle roller bearing with open ends




HN

Fig. 9
Drawn cup needle roller bearing with a closed end



BK

Fig. 11
Double row drawn cup needle roller bearing with open ends

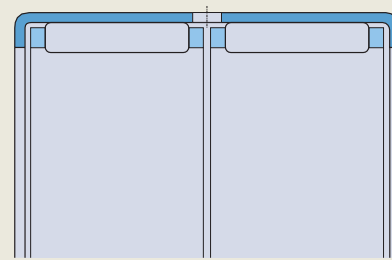

HK

Table 1

Technical specifications of SKF standard greases for full complement drawn cup needle roller bearings

Grease	Temperature range ¹⁾							Thickener	Base oil NLGI grade type	Base oil viscosity	
	–50	0	50	100	150	200	250 °C			[mm ² /s] at 40 °C	[mm ² /s] at 100 °C
Initial grease ill								Lithium soap	Mineral 1–2	200	18,7
LGEP 2								Lithium soap	Mineral 2	200	16
LGMW 1								Lithium soap	Mineral 1	200	16
	–60	30	120	210	300	390	480 °F				

¹⁾ Refer to the SKF traffic light concept ([page 117](#))

7 Needle roller bearings

Arrangements with components and other bearings

- Generally, drawn cup needle roller bearings run directly on a shaft. However, in applications where the shaft cannot be hardened and ground, bearings should be combined with an inner ring ([fig. 12](#), and Needle roller bearing inner rings, [page 593](#))
- Drawn cup needle roller bearings with wide inner rings ([fig. 12](#) and Needle roller bearing inner rings) provide an excellent counterface for the lips of external G or SD design seals ([skf.com/seals](#))
- Certain sizes of drawn cup needle roller bearings can be combined with a needle roller thrust bearing with a centring lange, AXW series ([fig. 13](#) and Needle roller thrust bearings, [page 895](#)), to accommodate combined radial and axial loads

Needle roller bearings with machined rings

SKF needle roller bearings with machined rings are made of carbon chromium bearing steel. SKF supplies these bearings with or without langes on the outer ring, in a wide range of series and sizes. SKF also supplies them with or without an inner ring.

Needle roller bearings with machined inner and outer rings

- are used for applications where the shaft cannot be hardened and ground ([fig. 14](#))
- have limited permissible axial displacement of the shaft relative to the housing ([fig. 3](#), [page 583](#) and [product table](#), [page 636](#)), which can be extended, if needed, by using a wide inner ring (Needle roller bearing inner rings, [page 593](#))


Needle roller bearings with a machined outer ring, without an inner ring

- are an excellent choice for compact bearing arrangements if the shaft can be hardened and ground ([fig. 15](#))
- enable a larger shaft diameter and a stiffer bearing arrangement compared to arrangements with bearings with inner rings


Axial displacement of the shaft relative to the housing is only limited by the width of the raceway on the shaft. By machining the shaft raceways to the appropriate dimensional and geometrical tolerances, it is possible to obtain bearing arrangements with tighter geometrical tolerances. For additional information, refer to Raceways on shafts and in housings, [page 179](#)

Fig. 12

Drawn cup needle roller bearing



With a standard inner ring



With a wide inner ring and an external seal

Fig. 13

Drawn cup needle roller bearing combined with a needle roller thrust bearing




Fig. 14

Needle roller bearing with machined rings




Fig. 15

Needle roller bearing with a machined outer ring





Fig. 16

Needle roller bearing with non-separable closure rings



NK ($F_w \leq 10 \text{ mm}$)

Basic design bearings

Needle roller bearings with machined rings, with langes

- are available open (without seals) or sealed on one or both sides
- are available with or without an inner ring
- with $D \leq 17 \text{ mm}$ ($F_w \leq 10 \text{ mm}$), are available with non-separable closure rings that act as langes (fig. 16)

The langes on larger bearings are an integral part of the outer ring, and the bearings have an annular groove and one or more lubrication holes in the outer ring (fig. 17)

- are generally designed as single row bearings, with the exception of RNA 69 (fig. 18) and NA 69 series double row bearings with $D \geq 52 \text{ mm}$ ($F_w \geq 40 \text{ mm}$)

The roller and cage assembly and outer ring of a needle roller bearing with langes form a non-separable unit

Needle roller bearings with machined rings, without langes

- are separable, i.e. the outer ring, needle roller and cage assembly, and inner ring, can all be mounted separately (fig. 19)

Needle roller and cage assemblies can, depending on the arrangement design, either be mounted:

- together with the outer ring
- together with the shaft
- together with the inner ring
- between the outer ring and shaft or inner ring as the final step

However, needle roller and cage assemblies and bearing outer rings must always be kept together as supplied

- are generally designed with one needle roller and cage assembly


However, wide sizes incorporate two needle roller and cage assemblies immediately adjacent to each other and have an annular groove and a lubrication hole in the outer ring (fig. 20)

Arrangements with other bearings

To accommodate combined radial and axial loads, needle roller bearings with machined rings can be combined with a needle roller thrust bearing with a centring lange, AXW series, if the outside diameter D of the radial bearing is equal to the lange diameter D_1 of the thrust bearing (fig. 21, and Needle roller thrust bearings, page 895)

Fig. 17

Needle roller bearing with integral langes in the outer ring



NK ($F_w \geq 12 \text{ mm}$)
NKS
RNA 48, RNA 49
RNA 69 ($F_w \leq 35 \text{ mm}$)

Fig. 19

Separable design





Fig. 18

Double row needle roller bearing with langes



RNA 69 ($F_w \geq 40 \text{ mm}$)

Fig. 20

Double row needle roller bearing without langes





Fig. 21

Needle roller bearing with a needle roller thrust bearing



Without an inner ring

With an inner ring

Alignment needle roller bearings

SKF alignment needle roller bearings have an outer ring with a sphered (convex) outside surface. Two polymer seating rings with a sphered (concave) inside surface are encased in a drawn sheet steel sleeve and fitted over the outer ring.

SKF supplies alignment needle roller bearings with or without an inner ring ([fig. 22](#)).

Bearings with an inner ring

- should be used in applications where the shaft cannot be hardened and ground
- have limited permissible axial displacement of the shaft relative to the housing ([product table, page 650](#)), which can be extended, if needed, by using a wide inner ring (Needle roller bearing inner rings, [page 593](#))

Bearings without an inner ring

- are an excellent choice for compact bearing arrangements, if the shaft can be hardened and ground

Combined needle roller bearings

SKF combined needle roller bearings consist of a radial needle roller bearing combined with a thrust bearing. They can accommodate both radial and axial loads. They are particularly suitable for applications where other types of locating bearing arrangements occupy too much space, or where the axial loads are too heavy, the speeds are too high, or the lubricant is inadequate for arrangements with simple thrust washers. SKF supplies combined needle roller bearings in the following basic designs:

- needle roller / angular contact ball bearing
- needle roller / thrust ball bearing
- needle roller / cylindrical roller thrust bearing

Relubrication intervals for the radial and thrust part of the bearing must be calculated separately. The shorter of the two intervals should be used. For additional information about lubrication, refer to Lubrication, [page 110](#).

Needle roller / angular contact ball bearings

SKF supplies needle roller / angular contact ball bearings without seals in two series ([fig. 23](#)):


- NKIA 59 series bearings can accommodate axial loads in one direction
- NKIB 59 series bearings can accommodate axial loads in both directions

These combined bearings:


- consist of a radial needle roller bearing and an angular contact ball bearing
- accommodate heavy radial loads, carried exclusively by the needle roller bearing
- accommodate light axial loads, carried exclusively by the angular contact ball bearing
- are low cross section bearings
- can operate at high speeds
- are separable, i.e. the inner ring can be mounted separately from the outer ring and rolling element and cage assemblies
- can be grease or oil lubricated, depending on the application

In the case of grease lubrication, both the needle roller and angular contact ball bearings should be filled with the same lubricant prior to mounting.

Alignment needle roller bearing



With an inner ring, PNA



Without an inner ring, RPNA

Fig. 22

NKIA series bearings

- can accommodate axial loads in one direction and, therefore, locate the shaft in one direction only
- can be mounted back-to-back (ig. 24), for short shafts and where changes in length due to thermal expansion are relatively minor


NKIB series bearings

- can locate the shaft in both directions
- have axial clearance, between 0,08 and 0,25 mm
- have a two-piece inner ring to facilitate mounting


When mounting the inner ring, it is important that the two pieces are axially clamped to one another
- have inner rings, which are not interchangeable with those from another seemingly identical bearing (keep together as supplied)

Fig. 23

Needleroller / angularcontactball bearing




NKIA 59



NKIB 59

Fig. 24

NKIA series bearings arranged back-to-back

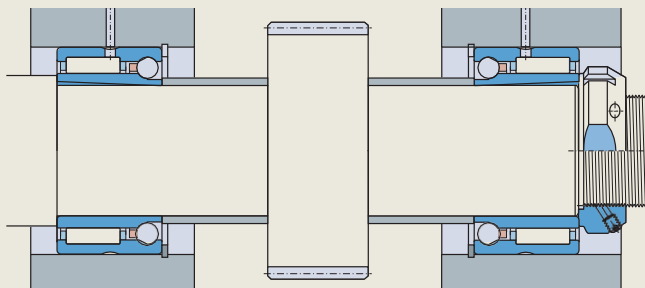

Needle roller / thrust ball bearings

SKF supplies needle roller / thrust ball bearings in two series (fig. 25):

- NX series with a full complement thrust ball bearing
- NKX series with a thrust ball bearing with a cage

These combined bearings:

- consist of a radial needle roller bearing and a thrust ball bearing
- are supplied without an inner ring
- can be combined with an inner ring (fig. 26), where the shaft cannot be hardened and ground (product tables, page 654 and page 656, must be ordered separately)
- can accommodate axial loads in one direction and, therefore, locate the shaft in one direction only

- can be mounted back-to-back (fig. 27), for short shafts and where changes in length due to thermal expansion are relatively minor

For these types of arrangements, SKF recommends preloading the thrust ball bearings with Belleville washers (cup springs). This preload helps to prevent the balls from skidding if one of the thrust bearings becomes unloaded. Preload also improves performance of the thrust ball bearings while reducing noise levels.

NX series bearings


- consist of a radial needle roller bearing and a full complement thrust ball bearing (fig. 28)
- are suitable for applications where there are moderate radial loads and lighter, single direction axial loads
- have low cross-sectional height, which enables shaft centrelines to be positioned close together like for multi-spindle drills
- can be mounted with a snap ring, or against a shoulder in the housing bore, for axial support

The snapping groove in the outer ring provides a cost-effective and axially space-saving solution (fig. 29 and product tables, 7.8, page 654)


- are most often oil lubricated and therefore supplied without grease
 - have a stamped steel cover that
 - extends over the shaft washer of the full complement thrust ball bearing
 - is firmly attached to the radial needle roller bearing
 - makes these bearings non-separable
 - has lubrication holes as standard
 - has no lubrication holes for bearings with designation suffix Z (fig. 28)
- These bearings can be grease lubricated

Fig. 25

Needle roller / thrust ball bearing




Full complement thrust bearing, NX




Thrust bearing with a cage, NKX

Fig. 27

NX series bearing with an inner ring



NKX series bearings arranged back-to-back, incorporating Belleville washers

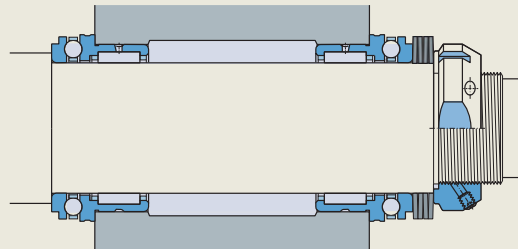


NKX series bearings with a cage

- consist of a radial needle roller bearing and a thrust ball bearing with a ball and cage thrust assembly identical to the 511 series (**ig. 30**)
- permit relatively high-speed operation
- are located axially in one direction by the outer ring lange
- can be mounted separately from both the ball and cage assembly and shaft washer
- should be oil lubricated, as there is no cover that retains the grease in the bearing
- have no stamped steel cover, as standard
- have a stamped steel cover for bearings with designation Z (**ig. 30**) that
 - has no lubrication holes
 - extends over the shaft washer of the thrust ball bearing
 - is firmly attached to the housing washer that is integral to the needle roller bearing outer ring
- makes these bearings non-separable

Fig. 28

Needle roller / full complement thrust ball bearing

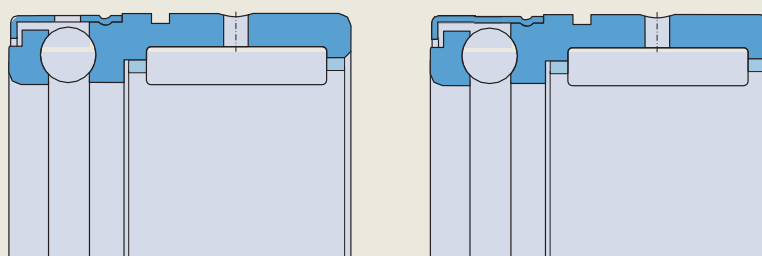

NX

NX..Z

Fig. 29

NX series bearing mounted with a snap ring





Fig. 30

Needle roller / thrust ball bearing with a cage

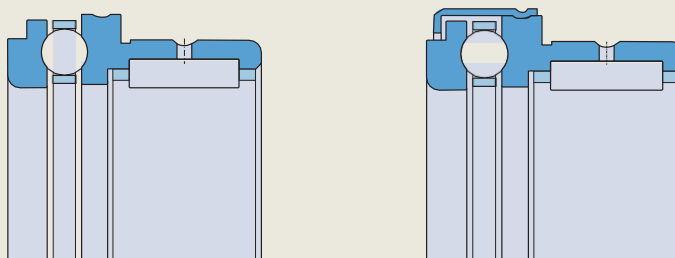

NKX

NKX..Z

7 Needle roller bearings

Needle roller / cylindrical roller thrust bearings

SKF supplies needle roller / cylindrical roller thrust bearings in the NKXR series (fig. 31)

These combined bearings:

- consist of a radial needle roller bearing and a cylindrical roller thrust bearing
- The cylindrical roller and cage thrust assembly is identical to the 811 series
- are supplied without an inner ring
- can be combined with an inner ring (fig. 32), where the shaft cannot be hardened and ground (product table, page 658, must be ordered separately)
- can accommodate axial loads in one direction
- can locate the shaft in one direction only
- can be mounted back-to-back (fig. 33) for short shafts and where changes in length due to thermal expansion are relatively minor

For these types of arrangements, SKF recommends preloading the thrust ball bearings with Belleville washers (cup springs). This elastic preload helps to prevent the balls from skidding if one of the thrust bearings becomes unloaded. Preload also improves performance of the thrust ball bearings while reducing noise levels.

NKXR series bearings

- are separable
- can be mounted separately from both the cylindrical roller and cage thrust assembly and the shaft washer
- should be oil lubricated, as oil facilitates an adequate supply of lubricant to the bearing
- have no stamped steel cover, as standard

- have a stamped steel cover for bearings with designation suffix Z (fig. 34) that
 - has no lubrication holes
 - extends over the shaft washer of the cylindrical roller thrust bearing
 - is firmly attached to the housing washer that is integral to the needle roller bearing outer ring
 - makes these bearings non-separable

Fig. 31

Needle roller / cylindrical roller thrust bearing




Fig. 32

NKXR .. Z bearing with an inner ring




Fig. 33

NKXR series bearings arranged back-to-back, incorporating Belleville washers



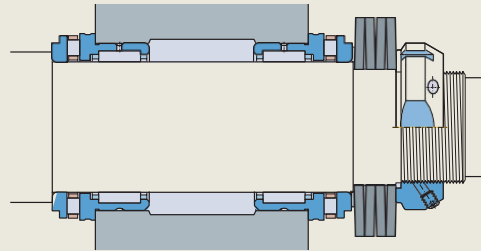


Fig. 34


Needle roller / cylindrical roller thrust bearing



Inner rings



IR



LR

Needle roller bearing components

Needle roller bearing inner rings

SKF supplies inner rings for needle roller bearings separately. They are typically combined with needle roller and cage assemblies (page 583) or drawn cup needle roller bearings (page 584) in applications where the shaft cannot be hardened and ground.

Inner rings are available in two series (ig. 35):

- IR series
 - with or without a lubrication hole
 - with or without a machining allowance
- LR series

Both inner ring series:

- are also available in different widths
- permit greater axial displacement of the shaft, relative to the housing, when they are wider than standard
 - provide an excellent counterface for the lips of contact seals (ig. 12, page 586)
- should be located on both sides to prevent axial movement (regardless of whether the ring has an interference or loose fit)
 - one side can be located against a shoulder
 - the other side can be located by either a snap ring, a distance ring or a nut

IR series inner rings

- are the standard SKF inner rings for needle roller bearings
- are hardened and ground
- have a precision ground raceway surface with a lead-in chamfer on both sides. The chamfers facilitate assembly and protect the seal lips from damage during the mounting process
- are available in some sizes with a lubrication hole (designation suffix IS1, ig. 36). Inner rings with additional lubrication holes are available on request
- are available on request with a pre-ground raceway and a machining allowance (designation suffix VGS, table 2). They can be finish ground after mounting on a shaft in applications where extremely tight geometrical tolerances are required

LR series inner rings

- are hardened, and the bore and raceway diameter are ground
- side faces are turned and the edges are smoothed
- can be used to provide a cost-effective bearing arrangement for applications where the larger run-out and width tolerances are less important

Needle rollers

Needle rollers can be used to design full complement bearing arrangements for low-speed or oscillating applications. These compact bearing arrangements have a very high load carrying capacity when compared to bearings with a cage and are economical, provided the shaft and housing bore can serve as raceways (Raceways on shafts and in housings, page 179).


Needle rollers:

- are not listed in this catalogue, but can be found online at skf.com/go/17000-7-12
- are made of carbon chromium steel
- have a hardness of 58 to 65 HRC
- have a precision ground surface

For assistance in designing full complement bearing arrangements or to calculate performance data for these bearing arrangements, contact the SKF application engineering service.

Fig. 36

Inner ring with a lubrication hole



IR..IS1

Raceway diameter F		Machining allowance z	Pre-ground raceway diameter F _{VGS}
>	≤		
mm	mm	mm	
–	50	0,10	F _{VGS} = F + z (tolerance class h7) 
50	80	0,15	
80	180	0,20	
180	250	0,25	
250	315	0,30	
315	400	0,35	
400	500	0,40	

Sealing solutions

Associated external seals

- can be used for needle roller bearing arrangements ([fig. 12, page 586](#))
- can be supplied in various sizes, as listed in the product tables:
 - Needle roller and cage assemblies, [page 614](#)
 - Drawn cup needle roller bearings, [page 618](#)
 - Needle roller bearings with machined rings with langes, without an inner ring, [page 624](#)

For information about associated power transmission seals, refer to skf.com/seals

Capped bearings

SKF supplies certain needle roller bearings capped with a seal or steel cover. The assortment of capped bearings includes:

- drawn cup needle roller bearings, sealed on one or both sides
- needle roller bearings with machined rings in the (R)NA 49 series, sealed on one or both sides
- combined needle roller bearings, capped with a steel cover over the thrust part of the bearing

When capped bearings must operate under certain conditions, such as very high speeds or high temperatures, some grease may leak. For bearing arrangements where this would be detrimental, appropriate actions could be taken.

Sealed drawn cup needle roller bearings

For applications where a sufficiently effective seal is not available, or cannot be used for space reasons, SKF supplies certain drawn cup needle roller bearings as sealed bearings. The assortment includes:

- drawn cup needle roller bearings with open ends ([fig. 37](#))
 - available for $8 \leq F_w \leq 50$ mm
 - sealed on one side (designation suffix RS)
 - sealed on both sides (designation suffix 2RS)
- sealed drawn cup needle roller bearings with a closed end (designation suffix RS, [fig. 38](#))
 - available for $10 \leq F_w \leq 25$ mm

These integral contact seals are made of PUR, FKM or NBR. Sealed drawn cup needle roller bearings are, under normal conditions and with appropriate counterface, an extremely cost-effective solution to exclude solid contaminants and moisture, and retain the lubricant in the bearing.

WARNING

Seals made of FKM (luoro rubber) exposed to an open flame or temperatures above 300 °C (570 °F) are a health and environmental hazard! They remain dangerous even after they have cooled. Read and follow the safety precautions on [page 197](#).

Fig. 37

Sealed drawn cup needle roller bearing with open ends


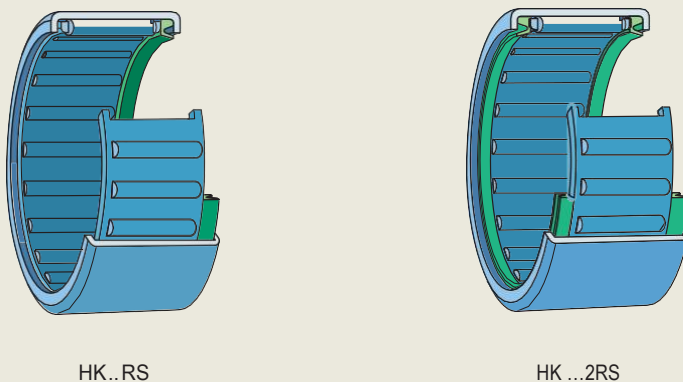


Fig. 38

Sealed drawn cup needle roller bearing with a closed end



Sealed needle roller bearings with machined rings

- are available in the (R)NA 49 series with a contact seal made of NBR (effective at keeping the lubricant in and contaminants out of the bearing) on one (designation suffix RS) or both sides (designation suffix 2RS) ([fig. 39](#))
- have an inner ring that is 1 mm wider than the outer ring, which maintains the effectiveness of the seals and simplifies the bearing arrangements even when small axial displacements occur

Capped combined needle roller bearings

SKF supplies certain combined needle roller bearings capped with a stamped steel cover over the thrust part of the bearing (designation suffix Z). The cover, which has no lubrication holes, forms a gap-type seal to retain

the grease in the bearing. The assortment includes:

- needle roller / full complement thrust ball bearings ([fig. 28](#), [page 591](#))
- needle roller / thrust ball bearings ([fig. 30](#), [page 591](#))
- needle roller / cylindrical roller thrust bearings ([fig. 34](#), [page 592](#))

Greases for capped bearings

Needle roller bearings with one or two seals are supplied greased. The thrust part of combined needle roller bearings with the designation suffix Z is also supplied greased. They are filled with high-quality grease ([table 3](#)) under clean conditions.

The relatively large quantity of grease in the bearings means they can be operated for long periods before relubrication is required. SKF recommends SKF LGWA 2 grease ([table 3](#)), if relubrication is required.

Relubrication features

SKF supplies needle roller bearings with different features to facilitate effective lubrication and relubrication.

Drawn cup needle roller bearings

All double row drawn cup needle roller bearings have one lubrication hole in the outer ring ([fig. 11](#), [page 585](#)), as standard.

On request, SKF can supply any single row drawn cup needle roller bearing for inside diameters under the rollers $F_w \geq 7$ mm with a lubrication hole in the outer ring ([fig. 40](#)).

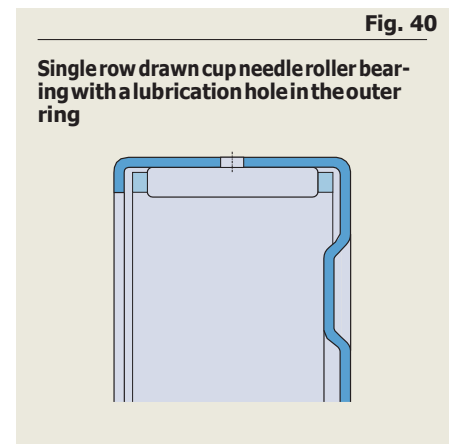
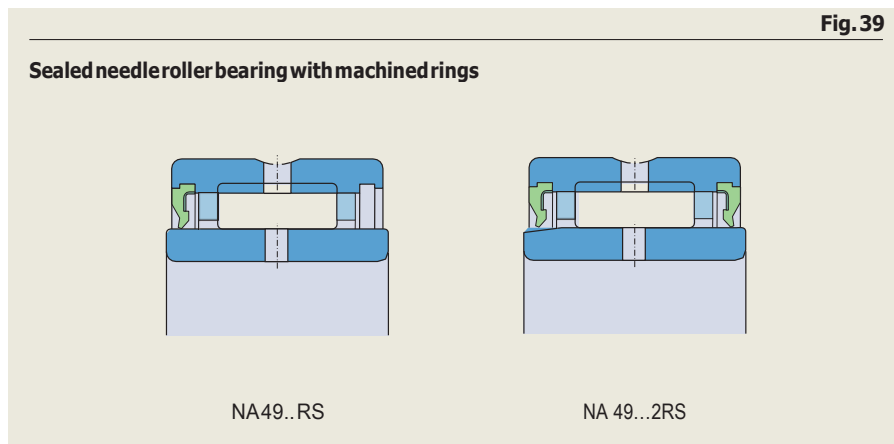


Table 3

Technical specifications of greases for capped needle roller bearings

Grease	Temperature range ¹⁾							Thickener	Base oil NLGI grade type	Base oil viscosity [mm ² /s]	
	-50	0	50	100	150	200	250 °C			at 40 °C (105 °F)	at 100 °C (210 °F)
Initial grease III								Lithium complex soap Mineral	2	160	15,5
LGWA 2								Lithium complex soap Mineral	2	185	15

-60 30 120 210 300 390 480 °F

¹⁾ Refer to the SKF traffic light concept ([page 117](#))

7 Needle roller bearings

Needle roller bearings with machined rings

- with langes and $D \geq 19\text{ mm}$ ($F, F_w \geq 12\text{ mm}$) have an annular groove and, depending on the bearing size, one or more lubrication holes in the outer ring (ig. 17, page 587)
- with seal(s) have an additional lubrication hole in the innerring (ig. 39, page 595)
- double row and without langes have an annular groove with one lubrication hole in the outer ring (ig. 20, page 587)
- without langes and with an inner ring have one lubrication hole in the inner ring for certain sizes (product table, page 636)

Combined needle roller bearings

The needle roller bearing used in combined bearings has an annular groove with one lubrication hole in the outer ring

Needle roller / full complement thrust ball bearings in the NX series without the designation suffix Z have a cover with lubrication holes over the thrust part of the bearing (ig. 28, page 591) Most often they are oil lubricated and, therefore, SKF supplies these bearings without grease

Cages

SKF needle roller bearings are fitted with one of the cage designs shown in table 4

When used at high temperatures, some lubricants can have a detrimental effect on polyamide cages For additional information about the suitability of cages, refer to Cages, page 187

Double row needle roller bearings





Double row needle roller and cage assemblies have a double row cage in the same design as a single row cage (ig. 4, page 583)

Other double row needle roller bearings are fitted with two cage assemblies (ig. 11, page 585, and ig. 18, page 587)

Cages for needle roller bearings

	Cages for radial bearings
Cage type	Window-type
Material	Sheet steel or machined steel
Suffix	–
Bearing types	
Needle roller and cage assemblies	Standard
Drawn cup needle roller bearings	–
Needle roller bearings with machined rings	–
Alignment needle roller bearings	–
Needle roller / angular contact ball bearings	–
Needle roller / thrust ball bearings	–
Needle roller / cylindrical roller thrust bearings	–

Table 4

Cages for thrust bearings								
								
Window-type	Window-type	Window-type	Window-type	Window-type	Window-type	Snap-type	Window-type	
Sheet steel or machined steel	Sheet steel	Sheet steel	Sheet steel or machined steel	Glassibre reinforced PA66	Sheet steel	Glassibre reinforced PA66	Glassibre reinforced PA66	
–	–	–	–	TN	–	–	–	
–	Standard	–	–	Standard	–	–	–	
–	–	Standard	–	Standard	–	–	–	
Standard	–	–	Standard	Standard	–	–	–	
Standard	–	–	Standard	–	–	–	–	
Standard	–	–	Standard	–	–	Standard	–	
Standard	–	–	Standard	Standard	Standard	–	–	
Standard	–	–	Standard	–	–	–	Standard	

Bearing data

	Needle roller and cage assemblies	Drawn cup needle roller bearings
Dimension standards	ISO 3030 when $F_w \leq 100$ mm, as far as standardized	Boundary dimensions: ISO 3245, as far as standardized
Tolerances For additional information * page ##	- rollers: ISO 3096 Grade 2 (grade G2) - tolerance of each gauge $2 \mu\text{m}$ - standard gauges (table 5, page 601) - specific gauge to be stated when ordering - U: ISO 3030, as far as standardized ($-0,2/-0,8$ mm)	ISO 3245, as far as standardized $F_w \approx$ within F8 (table 8, page 602) Measuring of F_w: - bearing must be pressed into a thick-walled ring gauge, bore diameter listed in table 8 - check deviation of F_w with measuring mandrel - C: $0/-0,3$ mm Dimensional tolerances can be checked only if bearings are mounted
Operating clearance	Range of C2 to Normal if: - itted with standard gauge rollers (table 5, page 601) - recommended raceway tolerances (table 6, page 601) applied - normal operating conditions	Range of C2 to C3 if recommended tolerances (table 17, page 610) applied
Internal clearance	Specific ranges: table 7, page 602	–
Permissible misalignment	≈ 1 minute of arc Misalignment increases bearing noise and reduces bearing service life, ...	≈ 1 minute of arc

	Needle roller bearings with machined rings	Alignment needle roller bearings
	Boundary dimensions: ISO 1206 for bearings in the (R)NA 48, (R)NA 49 and (R)NA 69 series	d, D: ISO 15 D ≤ 47 mm → diameter series 0 D ≥ 55 mm → diameter series 9
	Normal P6 or P5 on request • F _w : F6 (table 9, page 603) Values are valid for unmounted bearings when rollers are in contact with the outer ring raceway Tighter tolerance for inside diameter under the rollers on request (designation suffix H followed by two numbers that identify the tolerance limit, e.g. H+24+20) Values: ISO 492 (table 2, page 38 , to table 4, page 40)	• Normal for the inner ring and the outer ring with sphered outside surface • C of the external drawn sheet steel sleeve: ± 0,5 mm • F _w : F6 (table 9, page 603) Values are valid for unmounted bearings and when rollers are in contact with the outer ring raceway Values: ISO 492 (table 2, page 38)
	Bearings without an inner ring Suitable ranges (table 10, page 603) where: • recommended shaft tolerance classes applied • housing bore tolerance not tighter than K7 	Bearings without an inner ring Range of C2 to C3 if recommended tolerances (table 17, page 610) applied
	Normal (bearings with an inner ring) Check availability of C2, C3 or C4 clearance classes Values: ISO 5753-1 (table 11, page 603) Values are valid for unmounted bearings under zero measuring load	
	≈ 1 minute of arc	≤ 3° static misalignment No dynamic misalignment

... and when it exceeds the guideline value these effects become particularly noticeable



Bearing data, continued

	Needle roller / angular contact ball bearings	Needle roller / thrust ball bearings	Needle roller / cylindrical roller thrust bearings
Dimension standards	Boundary dimensions: ISO 15–dimension series 59, except for following inner ring parameters in the NKIB 59 series: - extended width on one side - slightly larger bore diameter of the narrow part	Boundary dimensions: DIN 5429-1, except for NX and NX...Z series bearings (not standardized)	Boundary dimensions: DIN 5429-1
Tolerances For additional information * page ##	Normal, except for width of the complete inner ring in the NKIB 59 series: 0/–0,3 mm Values: ISO 492 (table 2, page 38)	D: Normal F _w : F6 (table 9, page 603) d: E8 (table 9) C: 0/–0,25 mm C ₁ (applicable to NKX(R) series only): 0/–0,2 mm Values: Radial bearings → ISO 492 (table 2, page 38) Thrust bearings → ISO 199 (table 10, page 46)	
Operating clearance	–	Bearings without an inner ring Range slightly less than Normal if recommended tolerances (table 17, page 610) applied	
Internal clearance	Normal (bearings with an inner ring) Check availability of C2, C3 or C4 clearance classes Values: ISO 5753-1 (table 11, page 603) Values are valid for unmounted bearings under zero measuring load	–	
Permissible misalignment	Misalignment increases bearing noise and reduces bearing service life	Cannot tolerate any misalignment	

Bearing data, continued

	Needle roller bearing inner rings		Needle rollers
	IR series	LR series	
Dimension standards	—		ISO 3096, except for RN-2x6 3BF/G2 that is not standardized
Tolerances For additional information * page ##	Normal Values: ISO 492 (table 2, page 38), except for raceway tolerances (table 12, page 604)	F: h6 B: h12 d: K6 Values: table 13, page 604	ISO 3096 Grade 2 for lat end needle rollers Available tolerances (table 14, page 604)
Operating clearance	Depends on the bearing type with which the inner ring is combined		—
Internal clearance	Depends on the bearing type with which the inner ring is combined		—

Table 5

Needle roller gauges	
Gauge type	Gauge
—	μm
Standard gauges	0/-2 -1/-3 -2/-4 -3/-5 -4/-6 -5/-7

For additional gauges available on request, contact SKF

Table 6

Raceway tolerance classes for needle roller and cage assemblies				
Shaft Nominal diameter		Housing / shaft tolerance classes for operating clearance ¹⁾		
>	≤	lower side	medium	higher side
mm		—		
—	80	G6/j5 H6/h5	G6/h5 H6/g5	G6/g6 H6/f6
80	120	G6/h5	G6/g5	G6/f6
120	—	G6/h5 —	G6/g5 H6/f5	G6/f6 H6/e6

¹⁾ The envelope requirement (symbol  ISO 14405-1) is not shown but applies to all tolerance classes

Table 7

Mounting scheme – example

Needle roller and cage assembly: K 16x22x12
Housing bore diameter: 22H6/js7 [mm], deviation 0/+13 µm
Shaft diameter: 16h5/js7 [mm], deviation 0/–8 µm

Shaft diameter Housing bore diameter

Deviation group

Deviation groups

0 to +3

Needle roller Radial internal
gauge limits clearance

+3 to +6

Needle roller Radial internal
gauge limits clearance

+6 to +9

Needleroller Radial internal
gauge limits clearance

+9 to +13

Needleroller Radial internal
gauge limits clearance

µm

µm

0 to –3

–5/–7

18–24

–3/–5

17–24

–3 to –6

–5/–7

18–24

–3/–5

17–25

–2/–4

18–25

–4/–6

–6 to –8

–5/–7

18–25

–3/–5

17–24

–2/–4

18–25

0/–2

17–25

–6/–8

–4/–6

–3/–5

–1/–3

The mean value of the needle roller gauge should be used to calculate the internal clearance, e.g. –6 µm for the gauge –5 to –7 µm

Table 8

Tolerances for drawn cup needle roller bearings

Bearing Inside diameter F_w	Outside diameter D	Ring gauge Bore diameter (measured)	Deviations from nominal inside diameter	
			U	L
mm		mm	µm	
3	6,5	6,484	+24	+6
4	8	7,984	+28	+10
5	9	8,984	+28	+10
6	10	9,984	+28	+10
7	11	10,980	+31	+13
8	12	11,980	+31	+13
9	13	12,980	+31	+13
10	14	13,980	+31	+13
12	16	15,980	+34	+16
12	18	17,980	+34	+16
13	19	18,976	+34	+16
14	20	19,976	+34	+16
15	21	20,976	+34	+16
16	22	21,976	+34	+16
17	23	22,976	+34	+16

Bearing Inside diameter F_w	Outside diameter D	Ring gauge Bore diameter (measured)	Deviations from nominal inside diameter	
			U	L
mm		mm	µm	
18	24	23,976	+34	+16
20	26	25,976	+41	+20
22	28	27,976	+41	+20
25	32	31,972	+41	+20
28	35	34,972	+41	+20
30	37	36,972	+41	+20
32	39	38,972	+50	+25
35	42	41,972	+50	+25
40	47	46,972	+50	+25
45	52	51,967	+50	+25
50	58	57,967	+50	+25
55	63	62,967	+60	+30
60	68	67,967	+60	+30

Table 9

ISO tolerance classes

Nominal diameter		E8 		F6 	
>	≤	Deviation U	L	Deviation U	L
mm		μm		μm	
–	3	–	–	+12	+6
3	6	–	–	+27	+10
6	10	+47	+25	+33	+13
10	18	+59	+32	+27	+16
18	30	+73	+40	+33	+20
30	50	+89	+50	+41	+25
50	80	+106	+60	+49	+30
80	120	–	–	+58	+36
120	180	–	–	+68	+43
180	250	–	–	+79	+50
250	315	–	–	+88	+56
315	400	–	–	+98	+62
400	500	–	–	+108	+68

Table 10

Shaft tolerance classes for machined needle roller bearings without an inner ring

Nominal inside diameter F _w		Shaft tolerance classes ¹⁾ for shaft raceways to give operating clearance		
>	≤	lower side	medium	higher side
mm				
–	65	k5	h5	g6
65	80	k5	h5	f6
80	160	k5	g5	f6
160	180	k5	g5	e6
180	200	j5	g5	e6
200	250	j5	f6	e6
250	315	h5	f6	d6
315	400	g5	f6	d6

¹⁾ The envelope requirement (symbol , ISO 14405-1) is not shown but applies to all tolerance classes

Table 11

Radial internal clearance for needle roller bearings

Bore diameter d		Radial internal clearance C2		Normal		C3		C4	
>	≤	min	max	min	max	min	max	min	max
mm		μm							
–	30	0	25	20	45	35	60	50	75
30	40	5	30	25	50	45	70	60	85
40	50	5	35	30	60	50	80	70	100
50	65	10	40	40	70	60	90	80	100
65	80	10	45	40	75	65	100	90	125
80	100	15	50	50	85	75	110	105	140
100	120	15	55	50	90	85	125	125	165
120	140	15	60	60	105	100	145	145	190
140	160	20	70	70	120	115	165	165	215
160	180	25	75	75	125	120	170	170	220
180	200	35	90	90	145	140	195	195	250
200	225	45	105	105	165	160	220	220	280
225	250	45	110	110	175	170	235	235	300
250	280	55	125	125	195	190	260	260	330
280	315	55	130	130	205	200	275	275	350
315	355	65	145	145	225	225	305	305	385
355	400	100	190	190	280	280	370	370	460



Table 12

Inner ring raceway tolerances

Nominal diameter		F		$t_{\Delta Fmp}$ for CN and EGS	
>	≤	>	≤	U	L
mm	mm	mm	mm	μm	μm
–	3	3	6	–10	–27
3	6	6	10	–7	–23
6	10	6	10	–7	–23
6	18	10	18	–4	–18
10	24	18	30	0	–12
18	24	30	50	5	–4
24	30	24	30	0	–12
24	30	30	50	5	–4
30	40	30	50	0	–9
40	50	40	50	–5	–19
40	50	50	80	0	–11
50	65	50	80	–10	–21
65	80	65	80	–10	–26
65	80	80	120	–4	–17
80	100	80	120	–14	–27
100	120	100	120	–14	–32
100	120	120	180	–7	–22
120	140	120	180	–17	–37
140	160	140	180	–27	–52
160	180	160	180	–32	–57
160	180	180	250	–25	–46
180	200	180	250	–40	–66
200	225	200	250	–55	–86
225	250	250	315	–54	–87
250	280	250	315	–69	–107
280	315	315	400	–68	–107
315	335	315	400	–83	–127
355	400	355	400	–128	–182
355	400	400	500	–122	–172

Table 13

ISO tolerance classes for LR series inner rings

Nominal diameter		h6		h12		K6	
>	≤	U	L	U	L	U	L
mm	mm	μm	μm	μm	μm	μm	μm
6	10	0	–9	–	–	+2	–7
10	18	0	–11	0	–180	+2	–9
18	30	0	–13	0	–210	+2	–11
30	50	0	–16	0	–250	+3	–13
50	80	0	–19	–	–	–	–

Table 14

Dimensional and geometrical tolerances of SKF needle rollers, grade G2

Diameter D_w		Gauge tolerance	Gauge limits	Roundness (max circularity deviation in accordance with ISO 3096)	Length L_w Tolerance class
Deviation					
U	L				
mm	mm				–
0	–10	2	0/–2 –1/–3 –2/–4 –3/–5 –4/–6 –5/–7 –6/–8 –7/–9 –8/–10	1	h13

Preferred diameter deviations range from 0 to –7 μm
Each gauge is packed separately and marked with the gauge limits, e.g. N/M2 or M2/M4, where M signifies minus and N zero. For a needle roller with a 2 mm nominal diameter and gauge limits M2/M4, the actual diameter is between 1,998 mm and 1,996 mm

Loads

	Needle rollers and cage assemblies	Drawn cup needle roller bearings	Needle roller bearings with machined rings	Alignment needle roller bearings
Minimum load For additional information * page 106	$F_{rm} = 0,02 C$			
Equivalent dynamic bearing load For additional information * page 91	$P = F_r$			
Equivalent static bearing load For additional information * page 105	$P_0 = F_r$ For drawn cup needle roller bearings, SKF recommends applying a static safety factor $s_0 \geq 3$, i e $s_0 = C_0/P_0 \geq 3$			
	Symbols			
	A minimum load factor (product tables) C basic dynamic load rating [kN] (product tables) C_0 basic static load rating [kN] (product tables) d_m bearing mean diameter [mm] = 0,5 (d + D) F_a axial load [kN] F_{am} minimum axial load [kN] F_r radial load [kN] F_{rm} minimum radial load [kN] n rotational speed [r/min] P equivalent dynamic bearing load [kN] P_0 equivalent static bearing load [kN] s_0 static safety factor			

Combined needle roller bearings			
Thrust part			
Angular contact ball bearing	Thrust ball bearing	Cylindrical roller thrust bearing	
$F_{am} = 0,25 \frac{C_0}{1\,000} \left(\frac{q}{100\,000} \frac{n}{d_m} \right)^{1/2}$	$F_{am} = A \left(\frac{q}{1\,000} \frac{n}{d_m} \right)^{1/2}$	$F_{am} = 0,0005 C_0 + A \left(\frac{q}{1\,000} \frac{n}{d_m} \right)^{1/2}$	
$P = F_a$ F_a must not exceed $0,25 F_r$	$P = F_a$	$P = F_a$	
$P_0 = F_a$ F_a must not exceed $0,25 F_r$	$P_0 = F_a$	$P_0 = F_a$	



Temperature limits

The permissible operating temperature for needle roller bearings can be limited by:

- the dimensional stability of the bearing rings and rolling elements
- the cages
- the seals
- the seating rings
- the lubricant

Where temperatures outside the permissible range are expected, contact SKF

Bearing rings and rolling elements

SKF needle roller bearings, and roller and cage assemblies are heat stabilized up to 120 °C (250 °F)

Drawn cup needle roller bearings are heat stabilized up to 140 °C (285 °F)

Cages

Steel cages can be used at the same operating temperatures as the bearing rings and rolling elements. For temperature limits of polymer cages, refer to Polymer cages, [page 188](#)

Seals

The permissible operating temperature for seals depends on the seal material:

- NBR: -40 to +100 °C (-40 to +210 °F)
Temperatures up to 120 °C (250 °F) can be tolerated for brief periods
- PUR: -30 to +100 °C (-20 to +210 °F)
- FKM: -30 to +200 °C (-20 to +390 °F)
Temperatures up to 230 °C (445 °F) can be tolerated for brief periods

Typically, temperature peaks are at the seal lip

Seating rings

The permissible operating temperature for seating rings is -30 to +100 °C (-20 to +210 °F)

Lubricants

Temperature limits for greases used in capped needle roller bearings are provided in [table 3, page 595](#), and for full complement drawn cup needle roller bearings in [table 1, page 585](#). For temperature limits of other SKF greases, refer to Selecting a suitable SKF grease, [page 116](#)

When using lubricants not supplied by SKF, temperature limits should be evaluated according to the SKF traffic light concept ([page 117](#))

Permissible speed

The speed ratings in the **product tables** indicate:

- the **reference speed**, which enables a quick assessment of the speed capabilities from a thermal frame of reference
- the **limiting speed**, which is a mechanical limit that should not be exceeded unless the bearing design and the application are adapted for higher speeds

For additional information, refer to Operating temperature and speed, [page 129](#)

Design considerations

For general information, refer to Bearing interfaces, [page 140](#)

Abutment dimensions

Needle roller and cage assemblies

Appropriate abutment diameters are provided in [table 15](#)

Recommendations for surfaces of adjacent machine components that guide needle roller and cage assemblies axially:

- fine turned and polished
- hardened and ground for high-speed operations
- no interruptions

For less demanding applications, snap rings can be used. Otherwise, use an intermediate ring, e.g. a spring steel washer, between the snap ring and the cage assembly

Needle roller bearings with machined rings, without langes

Appropriate abutment diameters are listed in the [product tables](#)

Recommendations for surfaces of adjacent machine components that guide the cage of needle roller bearings without langes axially:

- fine turned and polished
- hardened and ground for high-speed operations
- no interruptions



For less demanding applications, snap rings can be used. Otherwise, use an intermediate ring, e.g. a spring steel washer, between the snap ring and the cage assembly

Combined needle roller bearings

The diameter of the thrust bearing support surface in the housing should be at least 0,5 mm larger than the dimension D_1 or D_2 ([fig. 41](#) and product tables of Needle roller / thrust ball bearings, [page 656](#), and Needle roller / cylindrical roller thrust bearings, [page 658](#))

Table 15


Abutment dimensions for needle roller and cage assemblies



Needle roller and cage assembly		Shaft abutment	Housing abutment
Inside diameter		d_a	D_a
F_w			
$>$	$\leq$		
mm		mm	mm
-	25	$E_w - 0,3$	$F_w + 0,4$
25	65	$E_w - 0,5$	$F_w + 0,5$
65	-	$E_w - 1$	$F_w + 1$

Fig. 41

Abutment dimensions, combined needle roller bearing



Shaft and housing tolerances

The following tables provide tolerance classes to obtain suitable fits and an appropriate operating clearance ([page 598](#)) for the following bearings:

- drawn cup needle roller bearings
- needle roller bearings with machined rings
- alignment needle roller bearings
- combined needle roller bearings

Shaft and housing raceway tolerances significantly influence the operating clearance of needle roller and cage assemblies and needle roller bearings with a machined outer ring (without an inner ring) and, therefore, are provided under Operating clearance, [page 598](#)

For additional information about raceways, refer to Raceways on shafts and in housings, [page 179](#)

Drawn cup needle roller bearings

Suitable tolerance classes for the housing bore and shaft for bearings with or without an inner ring are provided in [table 16](#)

Needle roller bearings with machined rings

- Suitable tolerance classes for the shaft for bearings with machined inner and outer rings are provided in [table 18](#)
- Housing seat tolerances for standard conditions are provided in [table 8, page 151](#)

Alignment needle roller bearings

Suitable tolerance classes for the housing bore and shaft for bearings with or without an inner ring are provided in [table 16](#)

Combined needle roller bearings

Suitable tolerance classes for the housing bore and shaft for bearings with or without an inner ring are provided in [table 17](#)

Table 16

Shaft and housing tolerance classes for drawn cup and alignment needle roller bearings

Housing material ¹⁾	Tolerance classes ²⁾		
	Housing bore seat ³⁾	Raceway on the shaft	Shaft inner ring seat
Steel, cast iron	N6	h5	k5
Light alloy	R6	h5	k5

¹⁾ For housings that are not rigid, determine the shaft tolerance by trial and error

²⁾ The envelope requirement (symbol  ISO 14405-1) is not shown but applies to all tolerance classes

³⁾ The geometrical tolerance in accordance with ISO 1101 for the housing bore of drawn cup needle roller bearings must correspond to IT5/2 tolerance grade

Shaft and housing tolerance classes for combined needle roller bearings

Thrust part	Tolerance class ¹⁾	
	Housing bore seat	Shaft (raceway and inner ring seat)
Angular contact ball bearing	M6	k5
Thrust ball bearing	K6 ²⁾	k5
Cylindrical roller thrust bearing	K6 ²⁾	k5

¹⁾ The envelope requirement (symbol  ISO 14405-1) is not shown but applies to all tolerance classes

²⁾ For stiff bearing arrangements, SKF recommends an M6  housing bore tolerance class

Mounting

Drawn cup and alignment needle roller bearings should be pressed into the housing bore using a mounting dolly (fig. 42). An O-ring provides a simple means of retaining the bearing on the mounting dolly. The stamped side (side face with the designation) should abut the flange of the mounting dolly.

Special care should be taken to prevent the bearing from skewing or tilting when it is being pressed into the housing. Otherwise the rollers and raceways could easily be damaged.

For grease lubricated bearings, the bearing should be lubricated prior to mounting.

Paired mounting

If bearings are to be mounted immediately adjacent to each other, the load should be shared equally by both bearings. Therefore, the following need to be considered:

- Full complement needle roller arrangements should incorporate rollers of the same gauge.
- Needle roller and cage assemblies should incorporate rollers of the same gauge.
- Drawn cup needle roller bearings should have the same deviations from the nominal inside diameter F_w .


A delivery of needle rollers of the same nominal diameter may contain packages of one or more gauges. The gauge limits are also printed on the package.

For needle roller and cage assemblies, the deviation from the nominal dimensions of the fitted needle rollers is printed on the package.

For additional information about gauges and inside diameter, refer to Tolerances, [page 598](#).

Fig. 42

Mounting dolly

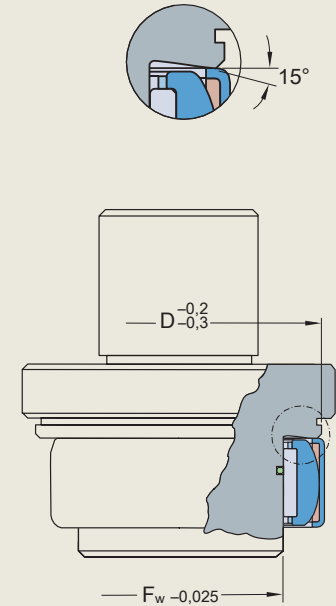

Shaft tolerance classes for needle roller bearings with machined inner and outer rings on solid steel shafts

Conditions	Shaft diameter	Dimensional tolerance ¹⁾	Total radial run-out Ra tolerance ²⁾	
–	mm	–	–	µm
Rotating inner ring load or direction of load indeterminate				
Light and variable loads ($P \leq 0,05 C$)				
	≤ 10	k5	IT5/2	0,4
	> 10 to 25	k6	IT5/2	0,8
	> 25 to 100	m6	IT5/2	0,8
Normal to heavy loads ($0,05 C < P \leq 0,1 C$)				
	≤ 25	k5	IT5/2	0,4
	> 25 to 60	m6	IT5/2	0,8
	> 60 to 100	n6	IT5/2	0,8
	> 100 to 400	p6 ³⁾	IT5/2	1,6
Heavy to very heavy loads ($P > 0,1 C$)				
	> 50 to 100	n6 ³⁾	IT5/2	0,8
	> 100 to 200	p6 ³⁾	IT5/2	1,6
	> 200	r6 ³⁾	IT5/2	1,6
Stationary inner ring load				
Easy axial displacement of the inner ring on the shaft desirable		g6	IT5/2	1,6
Easy axial displacement of the inner ring on the shaft unnecessary		h6	IT5/2	1,6

¹⁾ The envelope requirement (symbol in ISO 14405-1) is not shown but applies to all tolerance classes.

²⁾ Values listed are for bearings to Normal tolerances.

³⁾ Bearings with radial internal clearance greater than Normal may be necessary.

Designation system

			Group 1	Group 2	Group 3	/	
Preixes							
R	Bearing without an inner ring						
Basic designation							
BK	Drawn cup needle roller bearing with a closed end						
HK	Drawn cup needle roller bearing with open ends						
HN	Drawn cup needle roller bearing with open ends, full complement						
IR	Needle roller bearing inner ring						
K	Needle roller and cage assembly						
LR	Needle roller bearing inner ring						
NA 48, NA 49, NA 69	Needle roller bearing with machined rings, with langes, with an inner ring						
NAO	Needle roller bearing with machined rings, without langes, with an inner ring						
NK, NKS	Needle roller bearing with machined rings, with langes, without an inner ring						
NKI, NKIS	Needle roller bearing with machined rings, with langes, with an inner ring						
NKIA 59, NKIB 59	Needle roller / angular contact ball bearing						
NKX	Needle roller / thrust ball bearing						
NKXR	Needle roller / cylindrical roller thrust bearing						
NX	Needle roller / full complement thrust ball bearing						
PNA	Alignment needle roller bearing						
RN	Needle roller						
Suffixes							
Group 1: Internal design							
BF	Needle roller with lat ends						
D	Deviating or modified internal design with the same boundary dimensions Example: K40x45x17 D (Needle roller and cage assembly with a double split cage)						
DS	Single split needle roller and cage assembly						
EGS	Inner ring with a non-directionally ground raceway						
VGS	Inner ring with a pre-ground raceway and a machining allowance						
ZW	Double row needle roller and cage assembly (double row cage)						
Group 2: External design (seals, snap ring groove, etc.)							
AS..	Outer ring with lubrication hole(s), the number following indicates the number of holes						
ASR..	Outer ring with annular groove and lubrication hole(s), the number following indicates the number of holes						
IS..	Inner ring with lubrication hole(s), the number following indicates the number of holes						
ISR..	Inner ring with annular groove and lubrication hole(s), the number following indicates the number of holes						
RS, .2RS	Contact seal on one or both sides, respectively • NBR or FKM or PUR for a drawn cup needle roller bearing • NBR for a machined needle roller bearing						
Z	Combined needle roller bearing, factory greased thrust bearing with a cover without lubrication holes over the outside diameter						
Group 3: Cage design							
TN	Glass fibre reinforced PA66 cage						

Group 4					
4 1	4 2	4 3	4 4	4 5	4 6


Group 4.6: Other variants**VG052** Single split PES (polyethersulfone) cage**Group 4.5: Lubrication****SM..** Special grease, two numbers following identify the grease**Group 4.4: Stabilization****S0** Bearing or inner ring heat stabilized for operating temperatures $\leq 150\text{ }^{\circ}\text{C}$ ($300\text{ }^{\circ}\text{F}$)**S1** Bearing or inner ring heat stabilized for operating temperatures $\leq 200\text{ }^{\circ}\text{C}$ ($390\text{ }^{\circ}\text{F}$)**S2** Bearing or inner ring heat stabilized for operating temperatures $\leq 250\text{ }^{\circ}\text{C}$ ($480\text{ }^{\circ}\text{F}$)**S3** Bearing or inner ring heat stabilized for operating temperatures $\leq 300\text{ }^{\circ}\text{C}$ ($570\text{ }^{\circ}\text{F}$)**Group 4.3: Bearing sets, matched bearings****..S** Matched bearings for an equal load distribution. The number preceding indicates the number of bearings, e.g. NK 50/25 TN/2S**Group 4.2: Accuracy, clearance, preload, quiet running****/SORT..** Tolerance grade of needle rollers of a needle roller and cage assembly, the numbers following identify the actual limits in μm , e.g. /SORT-2-4**CN** Normal radial internal clearance; only used together with an additional letter that identifies a reduced or displaced clearance range**H** Reduced clearance range corresponding to the upper half of the actual clearance range**L** Reduced clearance range corresponding to the lower half of the actual clearance range**M** Reduced clearance range corresponding to the two middle quarters of the actual clearance range**P** Displaced clearance range comprising the upper half of the actual clearance range plus the lower half of the next larger clearance range**R** Normal clearance range in accordance with the withdrawn DIN 620-4

The above letters H, L, M and P are also used together with the clearance classes C2, C3, C4

C2 Radial internal clearance smaller than Normal**C3** Radial internal clearance greater than Normal**C4** Radial internal clearance greater than C3**G2** Needle roller in accordance with ISO 3096 Grade 2**H..** Bearing without an inner ring and reduced inside diameter (under rollers) tolerance, the numbers following indicate the tolerance limits in μm , e.g. H+27+20**M../M..** Diameter tolerance of needle rollers, e.g. M2/M4 indicates diameter tolerance -2 to $-4\text{ }\mu\text{m}$ **N/M..** Diameter tolerance of needle rollers, e.g. N/M2 indicates diameter tolerance 0 to $-2\text{ }\mu\text{m}$ **P5** Dimensional and geometrical tolerances to class P5**P6** Dimensional and geometrical tolerances to class P6**P62** P6 + C2**P63** P6 + C3**P6CNR** P6 + CNR**Group 4.1: Materials, heat treatment**

7.1 Needle roller and cage assemblies

F_w 3 – 30 mm



Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designation	Associated radial shaft seals ¹⁾	
F _w	E _w	U	dynamic C	static C ₀	P _u	Reference speed	Limiting speed			Single lip	Double lip
mm			kN		kN	r/min		g	–	–	
3	5	7	1,51	1,34	0,134	40 000	45 000	0,3	K 3x5x7 TN	–	–
	5	9	1,68	1,53	0,153	40 000	45 000	0,4	► K 3x5x9 TN	–	–
4	7	7	1,72	1,32	0,137	36 000	43 000	0,5	K 4x7x7 TN	–	–
	7	10	2,29	1,9	0,204	36 000	43 000	0,7	K 4x7x10 TN	–	–
5	8	8	2,29	2	0,212	36 000	40 000	0,7	K 5x8x8 TN	–	–
	8	10	2,92	2,7	0,29	36 000	40 000	0,9	► K 5x8x10 TN	–	–
6	9	8	2,55	2,36	0,25	34 000	38 000	0,8	K 6x9x8 TN	–	–
	9	10	3,3	3,2	0,345	34 000	38 000	1,1	K 6x9x10 TN	–	–
7	10	8	2,81	2,75	0,29	32 000	36 000	0,9	K 7x10x8 TN	–	–
	10	10	3,58	3,75	0,415	32 000	36 000	1	K 7x10x10 TN	–	–
8	11	10	3,8	4,25	0,465	32 000	36 000	1,2	K 8x11x10 TN	–	–
	11	13	5,01	5,85	0,67	32 000	36 000	1,7	K 8x11x13 TN	–	–
	12	10	4,84	4,75	0,54	30 000	34 000	2	K 8x12x10 TN	G 8x12x3	–
9	12	10	4,4	5,2	0,57	30 000	34 000	1,5	K 9x12x10 TN	–	–
10	13	10	4,57	5,7	0,63	28 000	32 000	1,6	► K 10x13x10 TN	–	–
	13	13	5,94	8	0,9	28 000	32 000	2,3	K 10x13x13 TN	–	–
	14	10	5,61	6,1	0,695	28 000	32 000	2,5	K 10x14x10 TN	G 10x14x3	–
	14	13	7,21	8,5	0,98	28 000	32 000	4,6	K 10x14x13 TN	G 10x14x3	–
	16	12	7,65	7,2	0,85	28 000	32 000	5,5	K 10x16x12 TN	–	–
12	15	10	4,73	6,2	0,695	26 000	30 000	2,9	K 12x15x10 TN	–	–
	15	13	6,16	8,65	0,98	26 000	30 000	2,3	K 12x15x13 TN	–	–
	16	13	7,65	9,5	1,1	26 000	30 000	3,6	K 12x16x13 TN	G 12x16x3	–
	17	13	9,13	10,4	1,22	26 000	30 000	4,9	K 12x17x13 TN	–	–
	18	12	9,52	10	1,18	26 000	30 000	6	K 12x18x12 TN	G 12x18x3	SD 12x18x3
14	18	10	6,93	8,65	1	24 000	28 000	4	K 14x18x10	–	–
	18	13	7,92	10,2	1,18	24 000	28 000	6,5	K 14x18x13	–	–
	18	15	9,13	12,5	1,46	24 000	28 000	5	K 14x18x15 TN	–	–
	18	17	10,5	14,6	1,7	24 000	28 000	8	K 14x18x17	–	–
15	19	13	8,25	11,2	1,29	24 000	28 000	7	► K 15x19x13	–	–
	19	17	10,8	15,6	1,86	24 000	28 000	9,5	► K 15x19x17	–	–
	21	15	13,8	16,3	2	24 000	26 000	11	K 15x21x15	G 15x21x3	SD 15x21x3
	21	21	18,7	24,5	3	24 000	26 000	17	K 15x21x21	G 15x21x3	SD 15x21x3

► Popular item

¹⁾ For additional information → skf.com/seals


Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designation	Associated radial shaft seals ¹⁾	
F _w	E _w	U	dynamic	static	P _u	Reference speed	Limiting speed			Single lip	Double lip
mm			kN		kN	r/min		g	–	–	
16	20	10	7,48	10	1,16	24 000	26 000	5,5	K 16x20x10	–	–
	20	13	8,58	12	1,37	24 000	26 000	7,5	K 16x20x13	–	–
	20	17	11,2	17	2	24 000	26 000	10	K 16x20x17	–	–
	22	12	11	12,5	1,5	22 000	26 000	10	K 16x22x12	G 16x22x3	SD 16x22x3
	22	16	14,2	17,6	2,12	22 000	26 000	12	K 16x22x16	G 16x22x3	SD 16x22x3
	22	20	17,6	22,8	2,8	22 000	26 000	17	K 16x22x20	G 16x22x3	SD 16x22x3
	24	20	20,5	23,6	2,9	22 000	24 000	22	K 16x24x20	G 16x24x3	SD 16x24x3
17	21	10	7,81	10,8	1,22	22 000	26 000	5,5	K 17x21x10	–	–
18	24	12	12,1	15	1,8	20 000	24 000	12	K 18x24x12	G 18x24x3	SD 18x24x3
19	23	13	9,13	13,7	1,6	20 000	24 000	8	K 19x23x13	–	–
20	24	10	8,58	12,9	1,46	20 000	22 000	6,5	K 20x24x10	–	–
	24	13	9,52	14,6	1,66	20 000	22 000	9	K 20x24x13	–	–
	24	17	12,5	20,8	2,4	20 000	22 000	12	K 20x24x17	–	–
	26	17	18,3	26	3,2	19 000	22 000	16	K 20x26x17	G 20x26x4	SD 20x26x4
	26	20	20,1	29	3,6	19 000	22 000	19	► K 20x26x20	G 20x26x4	SD 20x26x4
	28	20	22,9	28,5	3,45	18 000	20 000	27	K 20x28x20	G 20x28x4	SD 20x28x4
	28	25	29,2	39	4,9	18 000	20 000	32	► K 20x28x25	G 20x28x4	SD 20x28x4
21	30	30	34,1	41,5	5,2	17 000	20 000	49	K 20x30x30	–	–
	25	13	9,68	15,3	1,76	19 000	22 000	9	K 21x25x13	–	–
	26	10	8,8	13,7	1,56	18 000	20 000	7,5	► K 22x26x10	–	–
	26	13	10,1	16,3	1,86	18 000	20 000	9,5	K 22x26x13	–	–
	26	17	13,2	22,8	2,7	18 000	20 000	12	K 22x26x17	–	–
	28	17	18,3	27	3,25	17 000	20 000	18	K 22x28x17	G 22x28x4	SD 22x28x4
	29	16	19,4	25,5	3,05	17 000	19 000	16	K 22x29x16	–	–
22	30	15	19	23,6	2,8	17 000	19 000	18	K 22x30x15 TN	G 22x30x4	SD 22x30x4
	35	16	24,2	23,2	2,9	15 000	17 000	29	K 23x35x16 TN	–	–
	28	10	9,35	15	1,73	17 000	19 000	8,5	K 24x28x10	–	–
	28	13	10,6	18	2,08	17 000	19 000	10	K 24x28x13	–	–
	30	17	18,7	27,5	3,4	16 000	18 000	19	K 24x30x17	–	–
	29	10	9,52	15,6	1,8	16 000	18 000	8,5	K 25x29x10	–	–
	29	13	10,8	18,6	2,16	16 000	18 000	11	K 25x29x13	–	–
23	30	17	17,9	30,5	3,6	16 000	18 000	16	K 25x30x17	–	–
	30	20	20,9	36,5	4,4	16 000	18 000	18	K 25x30x20	–	–
	32	16	19,8	27,5	3,35	15 000	17 000	21	K 25x32x16	G 25x32x4	–
	33	20	27,5	38	4,65	15 000	17 000	33	K 25x33x20	G 25x33x4	SD 25x33x4
	35	30	44,6	62	7,8	15 000	17 000	65	► K 25x35x30	G 25x35x4	SD 25x35x4
	30	13	11,2	19,6	2,28	16 000	18 000	11	K 26x30x13	–	–
	33	13	14,7	24,5	2,85	14 000	16 000	13	K 28x33x13	–	–
24	33	17	19	33,5	4,05	14 000	16 000	17	K 28x33x17	–	–
	35	13	15,1	25,5	3	13 000	15 000	14	K 30x35x13	–	–
	35	17	18,7	34	4,05	13 000	15 000	19	K 30x35x17	–	–
	35	27	29,2	60	7,35	13 000	15 000	30	K 30x35x27	–	–
	37	18	25,1	39	4,65	13 000	15 000	30	K 30x37x18	G 30x37x4	SD 30x37x4
	40	30	46,8	69,5	8,65	12 000	14 000	73	K 30x40x30	G 30x40x4	SD 30x40x4

► Popular item

1) For additional information → skf.com/seals

7.1 Needle roller and cage assemblies

F_w 32 – 100 mm



Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designation	Associated radial shaft seals ¹⁾	
F _w	E _w	U	dynamic C	static C ₀	P _u	Reference speed	Limiting speed			Single lip	Double lip
mm			kN		kN	r/min		g	–	–	
32	37	13	14,7	25,5	3	13 000	14 000	18	K 32x37x13	–	–
	37	17	19	35,5	4,25	13 000	14 000	19	K 32x37x17	–	–
	38	20	25,1	45	5,6	12 000	14 000	30	K 32x38x20	–	–
	40	25	35,8	58,5	7,2	12 000	14 000	49	K 32x40x25	–	–
35	40	13	15,4	28	3,25	12 000	13 000	19	K 35x40x13	–	–
	40	17	19,8	39	4,65	12 000	13 000	21	K 35x40x17	–	–
	40	27	23,8	49	6	12 000	13 000	39	K 35x40x27 TN	–	–
	42	16	23,3	37,5	4,5	11 000	13 000	34	K 35x42x16	G 35x42x4	SD 35x42x4
	42	18	26,4	44	5,3	11 000	13 000	34	K 35x42x18	G 35x42x4	SD 35x42x4
	45	20	35,2	50	6,2	11 000	12 000	56	K 35x45x20	G 35x45x4	SD 35x45x4
37	42	17	21,6	43	5,2	11 000	13 000	22	K 37x42x17	–	–
38	43	17	19,8	39	4,65	11 000	12 000	29	K 38x43x17	–	–
	46	32	52,3	100	12,5	10 000	12 000	76	K 38x46x32	–	–
40	45	17	20,5	41,5	5	10 000	12 000	31	K 40x45x17	–	–
	45	27	31,4	73,5	9	10 000	12 000	46	K 40x45x27	–	–
	48	20	34,7	58,5	7,35	10 000	11 000	49	► K 40x48x20	–	–
42	47	17	20,9	43	5,2	10 000	11 000	32	K 42x47x17	–	–
	50	20	33,6	57	7,1	9 500	11 000	53	K 42x50x20	–	–
43	48	17	20,9	43	5,2	9 500	11 000	30	K 43x48x17	–	–
45	50	17	21,6	46,5	5,6	9 000	10 000	34	K 45x50x17	–	–
	50	27	33	81,5	10	9 000	10 000	52	K 45x50x27	–	–
	53	28	49,5	98	12,2	9 000	10 000	81	K 45x53x28	–	–
47	52	17	22,4	49	6	9 000	10 000	35	K 47x52x17	–	–
50	55	20	25,5	60	7,2	8 500	9 500	43	► K 50x55x20	–	–
	55	30	37,4	98	12	8 500	9 500	65	K 50x55x30	–	–
	57	18	31,9	64	7,8	8 000	9 000	47	K 50x57x18	–	–
	58	25	41,8	81,5	10,2	8 000	9 000	90	K 50x58x25	G 50x58x4	SD 50x58x4
55	60	20	27	67	8,15	7 500	8 500	40	K 55x60x20	–	–
	60	30	39,6	108	13,4	7 500	8 500	71	K 55x60x30	–	–
	62	18	34,1	71	8,5	7 500	8 500	52	K 55x62x18	–	–
	63	32	59,4	129	16,3	7 500	8 500	102	K 55x63x32	G 55x63x5	–

► Popular item

¹⁾ For additional information → skf.com/seals


Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designation	Associated radial shaft seals ¹⁾	
F _w	E _w	U	dynamic	static	P _u	Reference speed	Limiting speed			Single lip	Double lip
mm			kN		kN	r/min		g	–	–	
60	65	20	28,1	72	8,8	7 000	8 000	52	K 60x65x20	–	–
	68	25	51,2	112	14	6 700	7 500	89	K 60x68x25	–	–
65	73	30	53,9	125	15,6	6 300	7 000	141	► K 65x73x30	–	–
70	76	20	34,1	86,5	10,6	6 000	6 700	71	K 70x76x20	–	–
	78	30	57,2	137	17	6 000	6 700	148	K 70x78x30	G 70x78x5	–
75	83	23	47,3	110	13,7	5 300	6 300	124	K 75x83x23	–	–
80	88	30	68,2	176	22	5 000	6 000	138	K 80x88x30	–	–
85	92	20	42,9	108	13,2	4 800	5 600	102	K 85x92x20	–	–
90	97	20	42,9	114	13,7	4 500	5 300	109	K 90x97x20	–	–
	98	30	64,4	173	21,6	4 500	5 300	172	K 90x98x30	–	–
95	103	30	66	180	22,8	4 300	5 000	165	K 95x103x30	–	–
100	108	27	55	143	17,6	4 000	4 800	185	K 100x108x27	–	–

► Popular item


¹⁾ For additional information → skf.com/seals

7.2 Drawn cup needle roller bearings


F_w 3 – 17 mm



HK



HK...2RS



HK (doublerow)

Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designation
F_w	D	C	C	C_0	P_u	Reference speed	Limiting speed		
mm			kN		kN	r/min		g	—
3	6,5	6	1,23	0,88	0,088	24 000	26 000	1	► HK 0306 TN
4	8	8	1,76	1,37	0,14	22 000	26 000	2	► HK 0408
5	9	9	2,38	2,08	0,22	22 000	24 000	2	► HK 0509
6	10	8	2,01	1,73	0,18	20 000	22 000	2,1	► HK 0608
	10	9	2,81	2,7	0,285	20 000	22 000	2,5	HK 0609
7	11	9	3,03	3,05	0,325	20 000	22 000	2,6	HK 0709
8	12	8	2,7	2,75	0,285	19 000	22 000	2,7	► HK 0808
	12	10	3,69	4,05	0,44	19 000	22 000	3	► HK 0810
	12	12	2,7	2,75	0,285	—	13 000	3,3	► HK 0812.2RS
9	13	8	3,52	3,9	0,415	18 000	20 000	3	► HK 0908
	13	10	4,13	4,8	0,53	18 000	20 000	4	► HK 0910
	13	12	5,12	6,4	0,72	18 000	20 000	4,6	HK 0912
10	14	10	4,29	5,3	0,57	18 000	20 000	4,1	HK 1010
	14	12	5,39	6,95	0,78	18 000	20 000	4,8	► HK 1012
	14	14	4,29	5,3	0,57	—	12 000	4,6	► HK 1014.2RS
	14	15	6,6	9	1,02	18 000	20 000	6	► HK 1015
12	16	10	4,84	6,4	0,71	16 000	18 000	4,6	► HK 1210
	18	12	6,27	7,35	0,85	16 000	18 000	9,5	► HK 1212
	18	16	6,27	7,35	0,85	—	10 000	11	► HK 1216.2RS
13	19	12	6,6	8	0,915	16 000	17 000	10,5	► HK 1312
14	20	12	6,82	8,65	0,98	15 000	17 000	10,5	► HK 1412
15	21	12	7,65	9,5	1,08	15 000	16 000	11	► HK 1512
	21	16	10,1	14,6	1,7	15 000	16 000	15	► HK 1516
	21	22	13	20	2,28	15 000	16 000	20	► HK 1522¹⁾
16	22	12	7,37	9,8	1,12	14 000	16 000	12	► HK 1612
	22	16	10,5	15,6	1,8	14 000	16 000	16	► HK 1616
	22	20	10,5	15,6	1,8	—	9 000	18	HK 1620.2RS
	22	22	12,8	19,6	2,24	14 000	16 000	24	► HK 1622¹⁾
17	23	12	7,65	10,6	1,2	14 000	15 000	13	► HK 1712

► Popular item

¹⁾ Double row, outer ring with a lubrication hole


Dimensions		Associated inner rings ¹⁾		Associated radial shaftseals ²⁾	
F _w	r _{min}	IR series	LR series	Single lip	Double lip
mm		–		–	
3	0,3	–	–	–	–
4	0,3	–	–	G 4x8x2 S	–
5	0,4	–	–	G 5x9x2 S	–
6	0,4	–	–	G 6x10x2 S	–
	0,4	–	–	G 6x10x2 S	–
7	0,4	–	–	G 7x11x2 S	–
8	0,4	–	–	G 8x12x3	–
	0,4	IR 5x8x12	–	G 8x12x3	–
	0,4	–	–	–	–
9	0,4	–	–	G 9x13x3	–
	0,4	–	–	G 9x13x3	–
	0,4	IR 6x9x12	–	G 9x13x3	–
10	0,4	IR 7x10x10 5	LR 7x10x10 5	G 10x14x3	–
	0,4	IR 7x10x12	–	G 10x14x3	–
	0,4	–	–	–	–
	0,4	IR 7x10x16	–	G 10x14x3	–
12	0,4	IR 8x12x10 5	LR 8x12x10 5	G 12x16x3	–
	0,8	IR 8x12x12 5	LR 8x12x12 5	G 12x18x3	SD 12x18x3
	0,8	–	–	–	–
13	0,8	IR 10x13x12 5	LR 10x13x12 5	G 13x19x3	–
14	0,8	IR 10x14x13	–	G 14x20x3	SD 14x20x3
15	0,8	IR 12x15x12 5	LR 12x15x12 5	G 15x21x3	SD 15x21x3
	0,8	IR 12x15x16 5	LR 12x15x16 5	G 15x21x3	SD 15x21x3
	0,8	IR 12x15x22 5	LR 12x15x22 5	G 15x21x3	SD 15x21x3
16	0,8	IR 12x16x13	–	G 16x22x3	SD 16x22x3
	0,8	IR 12x16x16	–	G 16x22x3	SD 16x22x3
	0,8	–	–	–	–
	0,8	IR 12x16x22	–	G 16x22x3	SD 16x22x3
17	0,8	–	–	G 17x23x3	SD 17x23x3

¹⁾ For additional information → Needle roller bearing inner rings, [page 593](#)

²⁾ For additional information → skf.com/seals

7.2 Drawn cup needle roller bearings


F_w 18 – 30 mm



HK



HK...2RS



HK (doublerow)

Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designation
F_w	D	C	C	C_0	P_u	Reference speed	Limiting speed		
mm			kN		kN	r/min		g	–
18	24	12	7,92	11,2	1,27	13 000	15 000	13	► HK 1812
	24	16	7,92	11,2	1,27	–	8 500	15	HK 1816.2RS
	24	16	11,2	17,6	2,04	13 000	15 000	18	► HK 1816
20	26	10	6,16	8,5	0,93	12 000	14 000	12	HK 2010
	26	12	8,42	12,5	1,4	12 000	14 000	14	► HK 2012
	26	16	8,42	12,5	1,4	–	8 000	18	HK 2016.2RS
	26	16	12,3	20,4	2,36	12 000	14 000	19	► HK 2016
	26	20	12,3	20,4	2,36	–	8 000	23	► HK 2020.2RS
	26	20	15,1	26,5	3,15	12 000	14 000	24	► HK 2020
	26	30	20,9	40,5	4,75	12 000	14 000	35	► HK 2030¹⁾
22	28	10	7,21	10,6	1,2	11 000	12 000	13	HK 2210
	28	12	8,8	13,7	1,56	11 000	12 000	15	► HK 2212
	28	16	8,8	13,7	1,56	–	7 500	18	HK 2216.2RS
	28	16	13	22,4	2,6	11 000	12 000	21	► HK 2216
	28	20	13	22,4	2,6	–	7 500	23	HK 2220.2RS
	28	20	15,7	29	3,45	11 000	12 000	26	► HK 2220
	28	20	15,7	29	3,45	11 000	12 000	26	► HK 2220
25	32	12	10,5	15,3	1,76	9 500	11 000	20	► HK 2512
	32	16	10,5	15,3	1,76	–	6 700	27	HK 2516.2RS
	32	16	15,1	24	2,85	9 500	11 000	25	► HK 2516
	32	20	15,1	24	2,85	–	6 700	31	► HK 2520.2RS
	32	20	19	32,5	4	9 500	11 000	33	► HK 2520
	32	26	24,2	45	5,5	9 500	11 000	44	► HK 2526
	32	30	24,2	45	5,5	–	6 700	47	► HK 2530.2RS
	32	38	33	65,5	8	9 500	11 000	64	► HK 2538¹⁾
	32	38	33	65,5	8	9 500	11 000	64	► HK 2538¹⁾
28	35	16	15,7	26,5	3,15	9 000	9 500	26,5	► HK 2816
	35	20	15,7	26,5	3,15	–	6 300	34	HK 2820.2RS
	35	20	20,1	36,5	4,4	9 000	9 500	36	► HK 2820
30	37	12	11,7	18,3	2,12	8 000	9 000	23	► HK 3012
	37	16	11,7	18,3	2,12	–	5 600	31	HK 3016.2RS
	37	16	16,5	29	3,4	8 000	9 000	31	► HK 3016
	37	20	20,9	40	4,75	8 000	9 000	38	► HK 3020
	37	26	27	54	6,55	8 000	9 000	51	► HK 3026
	37	38	35,8	80	9,5	8 000	9 000	76	► HK 3038¹⁾

► Popular item

¹⁾ Double row, outer ring with a lubrication hole


Dimensions		Associated inner rings ¹⁾		Associated radial shaftseals ²⁾	
F _w	r _{min}	IR series	LR series	Single lip	Double lip
		mm	mm	mm	mm
18	0,8	–	LR 15x18x12 5	G 18x24x3	SD 18x24x3
	0,8	IR 15x18x16 5	LR 15x18x16 5	–	–
	0,8	IR 15x18x16 5	LR 15x18x16 5	G 18x24x3	SD 18x24x3
20	0,8	–	–	G 20x26x4	SD 20x26x4
	0,8	IR 15x20x13	–	G 20x26x4	SD 20x26x4
	0,8	IR 17x20x16 5	LR 17x20x16 5	–	–
	0,8	IR 17x20x16 5	LR 17x20x16 5	G 20x26x4	SD 20x26x4
	0,8	IR 17x20x20 5	LR 17x20x20 5	–	–
	0,8	IR 17x20x20 5	LR 17x20x20 5	G 20x26x4	SD 20x26x4
	0,8	IR 17x20x30 5	LR 17x20x30 5	G 20x26x4	SD 20x26x4
22	0,8	–	–	G 22x28x4	SD 22x28x4
	0,8	IR 17x22x13	–	G 22x28x4	SD 22x28x4
	0,8	IR 17x22x23	–	–	–
	0,8	IR 17x22x23	–	G 22x28x4	SD 22x28x4
	0,8	IR 17x22x23	–	–	–
	0,8	IR 17x22x23	–	G 22x28x4	SD 22x28x4
25	0,8	–	LR 20x25x12 5	G 25x32x4	–
	0,8	IR 20x25x17	LR 20x25x16 5	–	–
	0,8	IR 20x25x17	LR 20x25x16 5	G 25x32x4	–
	0,8	IR 20x25x20 5	LR 20x25x20 5	–	–
	0,8	IR 20x25x20 5	LR 20x25x20 5	G 25x32x4	–
	0,8	IR 20x25x26 5	LR 20x25x26 5	G 25x32x4	–
	0,8	IR 20x25x30	–	–	–
	0,8	IR 20x25x38 5	LR 20x25x38 5	G 25x32x4	–
	0,8	IR 22x28x17	–	G 28x35x4	SD 28x35x4
28	0,8	IR 22x28x20 5	LR 22x28x20 5	–	–
	0,8	IR 22x28x20 5	LR 22x28x20 5	G 28x35x4	SD 28x35x4
	0,8	IR 22x28x20 5	LR 22x28x20 5	G 28x35x4	SD 28x35x4
30	0,8	–	LR 25x30x12 5	G 30x37x4	SD 30x37x4
	0,8	IR 25x30x17	LR 25x30x16 5	–	–
	0,8	IR 25x30x17	LR 25x30x16 5	G 30x37x4	SD 30x37x4
	0,8	IR 25x30x20 5	LR 25x30x20 5	G 30x37x4	SD 30x37x4
	0,8	IR 25x30x26 5	LR 25x30x26 5	G 30x37x4	SD 30x37x4
	0,8	IR 25x30x38 5	LR 25x30x38 5	G 30x37x4	SD 30x37x4

¹⁾ For additional information → Needle roller bearing inner rings, [page 593](#)

²⁾ For additional information → skf.com/seals

7.2 Drawn cup needle roller bearings

F_w 35 – 60 mm

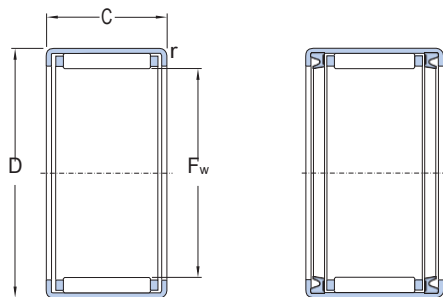

HK

HK ...2RS

Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designation
F_w	D	C	C	C_0	P_u	Reference speed	Limiting speed		
mm			kN		kN	r/min		g	–
35	42	12	12,5	21,6	2,45	7 000	8 000	27	► HK 3512
	42	16	17,9	34	4	7 000	8 000	36	► HK 3516
	42	20	17,9	34	4	–	5 000	41	HK 3520.2RS
	42	20	22,9	46,5	5,6	7 000	8 000	44	► HK 3520
40	47	12	13,4	24,5	2,8	6 300	7 000	30	► HK 4012
	47	16	14,5	27,5	3,15	–	4 500	37	HK 4016.2RS
	47	16	19	39	4,55	6 300	7 000	39	► HK 4016
	47	20	19	39	4,55	–	4 500	48	HK 4020.2RS
	47	20	24,2	53	6,4	6 300	7 000	54	► HK 4020
45	52	12	14,2	27,5	3,2	5 600	6 300	33	HK 4512
	52	16	20,5	43	5,1	5 600	6 300	47	► HK 4516
	52	20	20,5	43	5,1	–	4 000	54	HK 4520.2RS
	52	20	26	60	7,2	5 600	6 300	56	► HK 4520
50	58	20	29,2	63	7,8	5 000	5 600	70	► HK 5020
	58	24	29,2	63	7,8	–	3 600	81	HK 5024.2RS
	58	25	36,9	85	10,6	5 000	5 600	85	► HK 5025
55	63	20	30,3	67	8,3	4 500	5 000	74	► HK 5520
	63	28	41,8	104	12,9	4 500	5 000	105	HK 5528
60	68	12	17,6	32	3,8	4 300	4 800	49	HK 6012
	68	20	31,9	75	9,3	4 300	4 800	81	HK 6020
	68	32	51,2	137	17	4 300	4 800	136	HK 6032

► Popular item


Dimensions		Associated inner rings ¹⁾		Associated radial shaftseals ²⁾	
F _w	r _{min}	IR series	LR series	Single lip	Double lip
		mm	mm	mm	mm
35	0,8	–	LR 30x35x12 5	G 35x42x4	SD 35x42x4
	0,8	IR 30x35x17	LR 30x35x16 5	G 35x42x4	SD 35x42x4
	0,8	IR 30x35x20 5	LR 30x35x20 5	–	–
	0,8	IR 30x35x20 5	LR 30x35x20 5	G 35x42x4	SD 35x42x4
40	0,8	–	LR 35x40x12 5	G 40x47x4	SD 40x47x4
	0,8	IR 35x40x20	LR 35x40x16 5	–	–
	0,8	IR 35x40x20	LR 35x40x16 5	G 40x47x4	SD 40x47x4
	0,8	IR 35x40x20 5	LR 35x40x20 5	–	–
	0,8	IR 35x40x20 5	LR 35x40x20 5	G 40x47x4	SD 40x47x4
45	0,8	–	–	G 45x52x4	SD 45x52x4
	0,8	IR 40x45x17	LR 40x45x16 5	G 45x52x4	SD 45x52x4
	0,8	IR 40x45x20 5	LR 40x45x20 5	–	–
	0,8	IR 40x45x20 5	–	G 45x52x4	SD 45x52x4
50	0,8	–	LR 45x50x20 5	G 50x58x4	SD 50x58x4
	0,8	IR 45x50x25 5	LR 45x50x25 5	–	–
	0,8	IR 45x50x25 5	LR 45x50x25 5	G 50x58x4	SD 50x58x4
55	0,8	–	LR 50x55x20 5	G 55x63x5	–
	0,8	–	–	G 55x63x5	–
60	0,8	–	–	–	–
	0,8	–	–	–	–
	0,8	–	–	–	–

¹⁾ For additional information → Needle roller bearing inner rings, [page 593](#)

²⁾ For additional information → skf.com/seals

7.3 Needle roller bearings with machined rings with langes, without an inner ring


F_w 5 – 19 mm



NK ($F_w \leq 10$ mm)




NK ($F_w \geq 12$ mm)
RNA 49
RNA 69



RNA 49 ...2RS

Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designation
F_w	D	C	dynamic C	static C ₀	P _u	Reference speed	Limiting speed		
mm			kN		kN	r/min		kg	–
5	10	10	2,29	2	0,212	36 000	40 000	0,0031	► NK 5/10 TN
	10	12	2,92	2,7	0,29	36 000	40 000	0,0037	► NK 5/12 TN
6	12	10	2,55	2,36	0,25	34 000	38 000	0,0047	► NK 6/10 TN
	12	12	3,3	3,2	0,345	34 000	38 000	0,0057	► NK 6/12 TN
7	14	10	2,81	2,75	0,29	32 000	36 000	0,0069	NK 7/10 TN
	14	12	3,58	3,75	0,415	32 000	36 000	0,0082	NK 7/12 TN
8	15	12	3,8	4,25	0,465	32 000	36 000	0,0087	► NK 8/12 TN
	15	16	5,01	5,85	0,67	32 000	36 000	0,012	► NK 8/16 TN
9	16	12	4,4	5,2	0,57	30 000	34 000	0,01	► NK 9/12 TN
	16	16	5,72	7,2	0,815	30 000	34 000	0,013	NK 9/16 TN
10	17	12	4,57	5,7	0,63	28 000	32 000	0,01	► NK 10/12 TN
	17	16	5,94	8	0,9	28 000	32 000	0,013	► NK 10/16 TN
12	19	12	6,71	8,15	0,965	26 000	30 000	0,012	► NK 12/12
	19	16	9,13	12	1,43	26 000	30 000	0,016	► NK 12/16
14	22	13	7,37	8,15	0,965	–	12 000	0,016	► RNA 4900.2RS
	22	13	8,8	10,4	1,22	24 000	28 000	0,017	► RNA 4900
	22	16	10,2	12,5	1,5	24 000	28 000	0,021	► NK 14/16
	22	20	12,8	16,6	2	24 000	28 000	0,026	► NK 14/20
15	23	16	11	14	1,66	24 000	26 000	0,022	► NK 15/16
	23	20	13,8	18,3	2,2	24 000	26 000	0,027	► NK 15/20
16	24	13	8,09	9,65	1,14	–	11 000	0,018	► RNA 4901.2RS
	24	13	9,9	12,2	1,46	22 000	26 000	0,017	► RNA 4901
	24	16	11,7	15,3	1,8	22 000	26 000	0,022	► NK 16/16
	24	20	14,5	20	2,4	22 000	26 000	0,028	► NK 16/20
	24	22	16,1	23,2	2,75	22 000	26 000	0,031	► RNA 6901
17	25	16	12,1	16,6	1,96	22 000	26 000	0,024	► NK 17/16
	25	20	15,1	22	2,65	22 000	26 000	0,03	► NK 17/20
18	26	16	12,8	17,6	2,12	22 000	24 000	0,025	► NK 18/16
	26	20	16,1	23,6	2,85	22 000	24 000	0,031	► NK 18/20
19	27	16	13,4	19	2,28	20 000	24 000	0,026	► NK 19/16
	27	20	16,5	25,5	3,05	20 000	24 000	0,032	NK 19/20

► Popular item

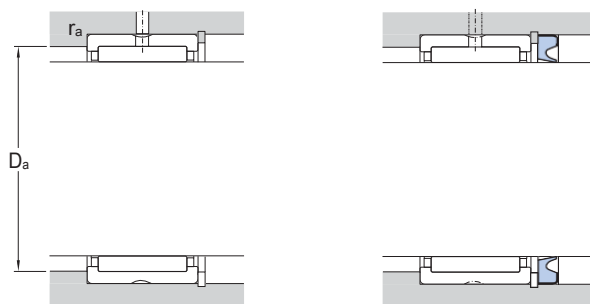


Dimensions		Abutment and illet dimensions		Associated radial shaft seals ¹⁾		
F _w	r _{1,2} min	D _a max	r _a max	Single lip	Double lip	Spring loaded lip
mm		mm		–		
5	0,15	8,8	0,1	G 5x10x2 S	–	–
	0,15	8,8	0,1	G 5x10x2 S	–	–
6	0,15	10,8	0,1	G 6x12x2 S	–	–
	0,15	10,8	0,1	G 6x12x2 S	–	–
7	0,3	12	0,3	G 7x14x2	–	–
	0,3	12	0,3	G 7x14x2	–	–
8	0,3	13	0,3	G 8x15x3	SD 8x15x3	–
	0,3	13	0,3	G 8x15x3	SD 8x15x3	–
9	0,3	14	0,3	G 9x16x3	–	–
	0,3	14	0,3	G 9x16x3	–	–
10	0,3	15	0,3	G 10x17x3	SD 10x17x3	–
	0,3	15	0,3	G 10x17x3	SD 10x17x3	–
12	0,3	17	0,3	G 12x19x3	SD 12x19x3	–
	0,3	17	0,3	G 12x19x3	SD 12x19x3	–
14	0,3	20	0,3	–	–	–
	0,3	20	0,3	G 14x22x3	SD 14x22x3	–
	0,3	20	0,3	G 14x22x3	SD 14x22x3	–
	0,3	20	0,3	G 14x22x3	SD 14x22x3	–
15	0,3	21	0,3	G 15x23x3	SD 15x23x3	–
	0,3	21	0,3	G 15x23x3	SD 15x23x3	–
16	0,3	22	0,3	–	–	–
	0,3	22	0,3	G 16x24x3	SD 16x24x3	–
	0,3	22	0,3	G 16x24x3	SD 16x24x3	–
	0,3	22	0,3	G 16x24x3	SD 16x24x3	–
	0,3	22	0,3	G 16x24x3	SD 16x24x3	–
17	0,3	23	0,3	G 17x25x3	SD 17x25x3	–
	0,3	23	0,3	G 17x25x3	SD 17x25x3	–
18	0,3	24	0,3	G 18x26x4	SD 18x26x4	–
	0,3	24	0,3	G 18x26x4	SD 18x26x4	–
19	0,3	25	0,3	G 19x27x4	SD 19x27x4	–
	0,3	25	0,3	G 19x27x4	SD 19x27x4	–


¹⁾ For additional information → skf.com/seals

7.3 Needle roller bearings with machined rings with langes, without an inner ring

F_w 20 – 29 mm




NK(S)
RNA49
RNA 69



RNA 49 ...2RS

Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designation
F _w	D	C	dynamic	static	P _u	Reference speed	Limiting speed		
mm			C	C ₀	kN	r/min		kg	–
20	28	13	9,13	12	1,43	–	9 500	0,022	► RNA 4902.2RS
	28	13	11,2	15,3	1,83	19 000	22 000	0,022	► RNA 4902
	28	16	13,2	19,3	2,28	19 000	22 000	0,027	► NK 20/16
	28	20	16,5	25,5	3,05	19 000	22 000	0,034	► NK 20/20
	28	23	17,2	27	3,35	19 000	22 000	0,04	► RNA 6902
	32	20	23,3	27	3,25	18 000	20 000	0,049	► NKS 20
21	29	16	13,8	20,4	2,45	19 000	22 000	0,028	NK 21/16
	29	20	17,2	27	3,35	19 000	22 000	0,035	NK 21/20
22	30	13	9,52	12,9	1,53	–	9 000	0,023	RNA 4903.2RS
	30	13	11,4	16,3	1,96	18 000	20 000	0,022	► RNA 4903
	30	16	14,2	21,6	2,6	18 000	20 000	0,03	► NK 22/16
	30	20	17,9	29	3,55	18 000	20 000	0,037	► NK 22/20
	30	23	18,7	30,5	3,75	18 000	20 000	0,042	► RNA 6903
24	32	16	15,4	24,5	2,9	16 000	19 000	0,032	► NK 24/16
	32	20	19	32,5	4	16 000	19 000	0,04	► NK 24/20
	37	20	26	33,5	4	15 000	17 000	0,066	NKS 24
25	33	16	15,1	24,5	2,9	16 000	18 000	0,033	► NK 25/16
	33	20	19	32,5	4	16 000	18 000	0,042	► NK 25/20
	37	17	19,4	22,4	2,65	–	7 500	0,056	► RNA 4904.2RS
	37	17	21,6	28	3,35	15 000	17 000	0,052	► RNA 4904
	37	30	35,2	53	6,55	15 000	17 000	0,1	► RNA 6904
	38	20	27,5	36	4,4	15 000	17 000	0,068	► NKS 25
26	34	16	15,7	26	3,1	15 000	17 000	0,034	► NK 26/16
	34	20	19,4	34,5	4,25	15 000	17 000	0,042	► NK 26/20
28	37	20	22	36,5	4,55	14 000	16 000	0,052	► NK 28/20
	37	30	31,9	60	7,5	14 000	16 000	0,082	► NK 28/30
	39	17	23,3	32	3,9	14 000	15 000	0,05	RNA 49/22
	39	30	36,9	57	7,2	14 000	15 000	0,098	RNA 69/22
	42	20	28,6	39	4,75	13 000	15 000	0,084	NKS 28
29	38	20	24,6	42,5	5,2	14 000	15 000	0,05	NK 29/20 TN
	38	30	31,9	60	7,5	14 000	15 000	0,084	NK 29/30

► Popular item

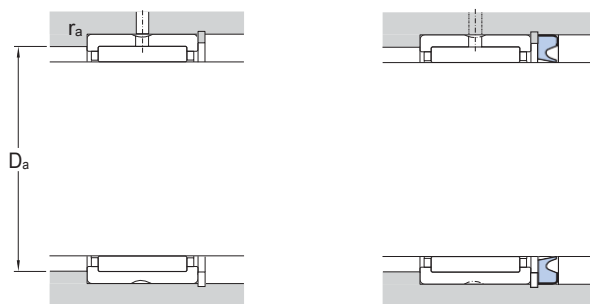


Dimensions		Abutment and illet dimensions		Associated radial shaft seals ¹⁾		
F _w	r _{1,2} min	D _a max	r _a max	Single lip	Double lip	Spring loaded lip
mm		mm		—		
20	0,3	26	0,3	—	—	—
	0,3	26	0,3	G 20x28x4	SD 20x28x4	—
	0,3	26	0,3	G 20x28x4	SD 20x28x4	—
	0,3	26	0,3	G 20x28x4	SD 20x28x4	—
	0,3	26	0,3	G 20x28x4	SD 20x28x4	—
	0,6	28	0,6	—	—	20x32x7 HMS5 RG
21	0,3	27	0,3	G 21x29x4	—	—
	0,3	27	0,3	G 21x29x4	—	—
22	0,3	28	0,3	—	—	—
	0,3	28	0,3	G 22x30x4	SD 22x30x4	—
	0,3	28	0,3	G 22x30x4	SD 22x30x4	—
	0,3	28	0,3	G 22x30x4	SD 22x30x4	—
	0,3	28	0,3	G 22x30x4	SD 22x30x4	—
	0,3	28	0,3	G 22x30x4	SD 22x30x4	—
24	0,3	30	0,3	G 24x32x4	SD 24x32x4	—
	0,3	30	0,3	G 24x32x4	SD 24x32x4	—
	0,6	33	0,6	—	—	24x37x7 HMS5 RG
25	0,3	31	0,3	G 25x33x4	SD 25x33x4	—
	0,3	31	0,3	G 25x33x4	SD 25x33x4	—
	0,3	35	0,3	—	—	—
	0,3	35	0,3	—	—	25x37x5 HMS5 RG
	0,3	35	0,3	—	—	25x37x5 HMS5 RG
	0,6	34	0,6	—	—	25x38x7 HMS5 RG
26	0,3	32	0,3	G 26x34x4	SD 26x34x4	—
	0,3	32	0,3	G 26x34x4	SD 26x34x4	—
28	0,3	35	0,3	G 28x37x4	—	—
	0,3	35	0,3	G 28x37x4	—	—
	0,3	37	0,3	—	—	—
	0,3	37	0,3	—	—	—
	0,6	38	0,6	—	—	28x42x7 HMS5 RG
	0,6	38	0,6	—	—	—
29	0,3	36	0,3	G 29x38x4	—	—
	0,3	36	0,3	G 29x38x4	—	—

¹⁾ For additional information → skf.com/seals

7.3 Needle roller bearings with machined rings with langes, without an inner ring


F_w 30 – 43 mm



NK(S)
RNA 49
RNA 69 ($F_w \leq 38$ mm)




RNA 49...2RS



RNA 69 ($F_w \geq 40$ mm)

Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designation
F_w	D	C	dynamic C	static C ₀	P _u	Reference speed	Limiting speed		
mm			kN		kN	r/min		kg	–
30	40	20	25,1	44	5,5	13 000	15 000	0,061	► NK 30/20 TN
	40	30	36,9	72	9	13 000	15 000	0,092	► NK 30/30 TN
	42	17	21,6	27,5	3,25	–	6 300	0,06	► RNA 4905.2RS
	42	17	24,2	34,5	4,15	13 000	15 000	0,061	► RNA 4905
	42	30	38	62	7,65	13 000	15 000	0,11	► RNA 6905
	45	22	31,9	43	5,3	12 000	14 000	0,1	► NKS 30
32	42	20	26,4	48	6	12 000	14 000	0,064	► NK 32/20 TN
	42	30	34,1	65,5	8,3	12 000	14 000	0,1	► NK 32/30 TN
	45	17	25,1	36,5	4,4	12 000	14 000	0,073	► RNA 49/28
	45	30	39,6	65,5	8,3	12 000	14 000	0,14	► RNA 69/28
	47	22	34,1	46,5	5,7	12 000	13 000	0,11	► NKS 32
35	45	20	27,5	52	6,55	11 000	13 000	0,069	► NK 35/20 TN
	45	30	40,2	85	10,6	11 000	13 000	0,11	► NK 35/30 TN
	47	17	23,3	32	3,8	–	5 600	0,069	► RNA 4906.2RS
	47	17	25,5	39	4,65	11 000	13 000	0,069	► RNA 4906
	47	30	42,9	75	9,3	11 000	13 000	0,13	► RNA 6906
	50	22	35,2	50	6,2	11 000	12 000	0,12	► NKS 35
37	47	20	25,1	46,5	5,85	11 000	12 000	0,077	NK 37/20
	47	30	36,9	76,5	9,5	11 000	12 000	0,11	NK 37/30
	52	22	36,9	54	6,55	10 000	12 000	0,12	NKS 37
38	48	20	25,5	49	6,1	11 000	12 000	0,079	► NK 38/20
	48	30	37,4	80	10	11 000	12 000	0,12	► NK 38/30
40	50	20	29,7	60	7,5	10 000	11 000	0,078	► NK 40/20 TN
	50	30	38	83	10,4	10 000	11 000	0,13	► NK 40/30
	52	20	30,8	51	6,3	10 000	11 000	0,089	► RNA 49/32
	52	36	47,3	90	10,8	10 000	11 000	0,16	► RNA 69/32
	55	22	38	57	7,1	9 500	11 000	0,13	► NKS 40
42	52	20	27	53	6,55	9 500	11 000	0,086	► NK 42/20
	52	30	39,1	86,5	10,8	9 500	11 000	0,13	► NK 42/30
	55	20	27	43	5,3	–	4 800	0,11	► RNA 4907.2RS
	55	20	31,9	54	6,7	9 500	11 000	0,11	► RNA 4907
	55	36	48,4	93	11,4	9 500	11 000	0,19	► RNA 6907
43	53	20	27,5	55	6,8	9 500	11 000	0,086	NK 43/20
	53	30	40,2	90	11,2	9 500	11 000	0,13	NK 43/30
	58	22	39,1	61	7,5	9 000	10 000	0,14	NKS 43

► Popular item

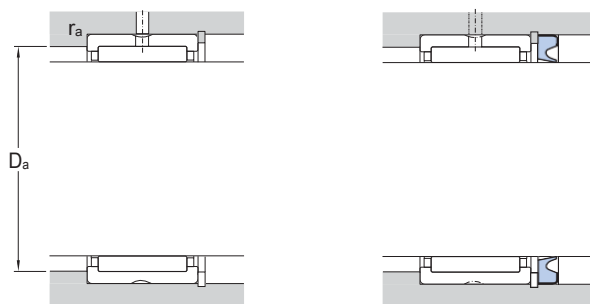


Dimensions		Abutment and illet dimensions		Associated radial shaft seals ¹⁾		
F_w	$r_{1,2}$ min	D_a max	r_a max	Single lip	Double lip	Spring loaded lip
mm		mm		—		
30	0,3	38	0,3	G 30x40x4	SD 30x40x4	—
	0,3	38	0,3	G 30x40x4	SD 30x40x4	—
	0,3	40	0,3	—	—	—
	0,3	40	0,3	—	—	30x42x6 HMS5 RG
	0,3	40	0,3	—	—	30x42x6 HMS5 RG
	0,6	41	0,6	—	—	30x45x7 HMS5 RG
32	0,3	40	0,3	G 32x42x4	SD 32x42x4	—
	0,3	40	0,3	G 32x42x4	SD 32x42x4	—
	0,3	43	0,3	G 32x45x4	—	—
	0,3	43	0,3	G 32x45x4	—	—
	0,6	43	0,6	—	—	32x47x6 HMS5 RG
35	0,3	43	0,3	G 35x45x4	SD 35x45x4	—
	0,3	43	0,3	G 35x45x4	SD 35x45x4	—
	0,3	45	0,3	—	—	—
	0,3	45	0,3	—	—	35x47x6 HMS5 RG
	0,3	45	0,3	—	—	35x47x6 HMS5 RG
	0,6	46	0,6	—	—	35x50x7 HMS5 RG
37	0,3	45	0,3	G 37x47x4	SD 37x47x4	—
	0,3	45	0,3	G 37x47x4	SD 37x47x4	—
	0,6	48	0,6	—	—	37x52x8 HMS4 R
38	0,3	46	0,3	G 38x48x4	SD 38x48x4	—
	0,3	46	0,3	G 38x48x4	SD 38x48x4	—
40	0,3	48	0,3	G 40x50x4	SD 40x50x4	—
	0,3	48	0,3	G 40x50x4	SD 40x50x4	—
	0,6	48	0,6	G 40x52x5	SD 40x52x5	—
	0,6	48	0,6	G 40x52x5	SD 40x52x5	—
	0,6	51	0,6	—	—	40x55x7 HMS5 RG
42	0,3	50	0,3	G 42x52x4	SD 42x52x4	—
	0,3	50	0,3	G 42x52x4	SD 42x52x4	—
	0,6	51	0,6	—	—	—
	0,6	51	0,6	—	—	42x55x7 HMS5 RG
	0,6	51	0,6	—	—	42x55x7 HMS5 RG
43	0,3	51	0,3	G 43x53x4	—	—
	0,3	51	0,3	G 43x53x4	—	—
0,6				—	—	—


¹⁾ For additional information → [skf.com/seals](https://www.skf.com/seals)

7.3 Needle roller bearings with machined rings with langes, without an inner ring


F_w 45 – 70 mm



NK(S)
RNA49




RNA49...2RS



RNA 69

Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designation
F_w	D	C	dynamic	static	P_u	Reference speed	Limiting speed		
mm			C	C_0	kN	r/min		kg	–
45	55	20	31,4	65,5	8,3	9 000	10 000	0,085	► NK 45/20 TN
	55	30	45,7	108	13,7	9 000	10 000	0,13	► NK 45/30 TN
	60	22	40,2	64	8	8 500	10 000	0,15	► NKS 45
47	57	20	29,2	61	7,65	8 500	10 000	0,095	NK 47/20
	57	30	41,8	98	12,5	8 500	10 000	0,14	► NK 47/30
48	62	22	36,9	58,5	7,1	–	4 000	0,15	RNA 4908.2RS
	62	22	42,9	71	8,8	8 000	9 500	0,14	► RNA 4908
	62	40	67,1	125	15,3	8 000	9 500	0,26	► RNA 6908
50	62	25	42,9	91,5	11,2	8 000	9 000	0,15	► NK 50/25 TN
	62	35	58,3	137	17	8 000	9 000	0,21	► NK 50/35 TN
	65	22	42,9	72	8,8	8 000	9 000	0,16	NKS 50
52	68	22	39,1	64	7,8	–	3 800	0,16	RNA 4909.2RS
	68	22	45,7	78	9,65	7 500	8 500	0,18	RNA 4909
	68	40	70,4	137	17	7 500	8 500	0,34	► RNA 6909
55	68	25	40,2	88	10,8	7 500	8 500	0,18	► NK 55/25
	68	35	52,3	122	15,3	7 500	8 500	0,25	NK 55/35
	72	22	44,6	78	9,8	7 000	8 000	0,22	► NKS 55
58	72	22	40,2	69,5	8,5	–	3 400	0,16	► RNA 4910.2RS
	72	22	47,3	85	10,6	7 000	8 000	0,16	► RNA 4910
	72	40	73,7	150	18,6	7 000	8 000	0,31	► RNA 6910
60	72	25	46,8	110	13,4	6 700	7 500	0,17	NK 60/25 TN
	72	35	55	134	17	6 700	7 500	0,26	► NK 60/35
	80	28	62,7	104	13,2	6 300	7 500	0,34	► NKS 60
63	80	25	57,2	106	13,2	6 300	7 000	0,26	► RNA 4911
	80	45	89,7	190	23,2	6 300	7 000	0,47	► RNA 6911
65	78	25	44	104	12,7	6 300	7 000	0,22	► NK 65/25
	78	35	58,3	146	18,3	6 300	7 000	0,31	► NK 65/35
	85	28	66	114	14,6	6 000	6 700	0,36	NKS 65
68	82	25	44	95	11,8	6 000	6 700	0,24	NK 68/25
	82	35	60,5	146	18,3	6 000	6 700	0,34	NK 68/35
	85	25	60,5	114	14,3	6 000	6 700	0,28	► RNA 4912
	85	45	93,5	204	25	6 000	6 700	0,49	► RNA 6912
70	85	25	44,6	98	12,2	6 000	6 700	0,26	► NK 70/25
	85	35	61,6	150	19	6 000	6 700	0,37	► NK 70/35
	90	28	68,2	120	15,3	5 600	6 300	0,38	► NKS 70

► Popular item

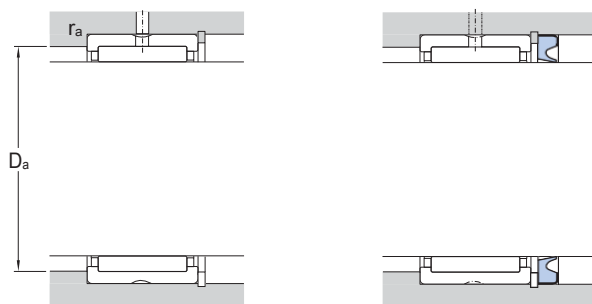


Dimensions		Abutment and illet dimensions		Associated radial shaft seals ¹⁾		
F_w	$r_{1,2}$ min	D_a max	r_a max	Single lip	Double lip	Spring loaded lip
mm		mm		–		
45	0,3	53	0,3	G 45x55x4	SD 45x55x4	–
	0,3	53	0,3	G 45x55x4	SD 45x55x4	–
	0,6	56	0,6	–	–	45x60x7 HMS5 RG
47	0,3	55	0,3	–	–	–
	0,3	55	0,3	–	–	–
48	0,6	58	0,6	–	–	–
	0,6	58	0,6	–	–	48x62x8 HMS5 RG
	0,6	58	0,6	–	–	48x62x8 HMS5 RG
50	0,6	58	0,6	G 50x62x5	SD 50x62x5	–
	0,6	58	0,6	G 50x62x5	SD 50x62x5	–
	1	60	1	–	–	50x65x8 HMS5 RG
52	0,6	64	0,6	–	–	–
	0,6	64	0,6	–	–	52x68x8 HMS5 RG
	0,6	64	0,6	–	–	52x68x8 HMS5 RG
55	0,6	64	0,6	–	–	55x68x8 HMS5 RG
	0,6	64	0,6	–	–	55x68x8 HMS5 RG
	1	67	1	–	–	55x72x8 HMS5 RG
58	0,6	68	0,6	–	–	–
	0,6	68	0,6	–	–	58x72x8 HMS5 RG
	0,6	68	0,6	–	–	58x72x8 HMS5 RG
60	0,6	68	0,6	–	–	60x72x8 HMS5 RG
	0,6	68	0,6	–	–	60x72x8 HMS5 RG
	1,1	73,5	1	–	–	60x80x8 HMS5 RG
63	1	75	1	–	–	63x80x8 CRW1 R
	1	75	1	–	–	63x80x8 CRW1 R
65	0,6	74	0,6	–	–	–
	0,6	74	0,6	–	–	–
	1,1	78,5	1	–	–	65x85x8 HMS5 RG
68	0,6	78	0,6	–	–	–
	0,6	78	0,6	–	–	–
	1	80	1	–	–	–
	1	80	1	–	–	68x85x8 CRW1 R
70	0,6	81	0,6	–	–	70x85x8 HMS5 RG
	0,6	81	0,6	–	–	70x85x8 HMS5 RG
		83,5	1	–	–	70x90x10 HMS5 RG


¹⁾ For additional information → [83,5](#) [seals](#) [1](#)

7.3 Needle roller bearings with machined rings with langes, without an inner ring

F_w 72 – 105 mm




NK(S)
RNA49



RNA 69

Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designation
F _w	D	C	dynamic	static	P _u	Reference speed	Limiting speed		
mm			C	C ₀	kN	r/min		kg	–
72	90	25	61,6	120	14,6	5 600	6 300	0,31	RNA 4913
	90	45	95,2	212	26	5 600	6 300	0,58	► RNA 6913
73	90	25	52,8	106	13,2	5 600	6 300	0,3	NK 73/25
	90	35	73,7	163	20,4	5 600	6 300	0,43	NK 73/35
75	92	25	53,9	110	13,7	5 300	6 000	0,32	NK 75/25
	92	35	74,8	170	21,2	5 300	6 000	0,45	► NK 75/35
	95	28	70,4	132	16,6	5 300	6 000	0,4	NKS 75
80	95	25	56,1	127	15,6	5 000	5 600	0,3	► NK 80/25
	95	35	76,5	190	24	5 000	5 600	0,43	► NK 80/35
	100	30	84,2	163	20,8	5 000	5 600	0,46	► RNA 4914
	100	54	128	285	36	5 000	5 600	0,86	► RNA 6914
85	105	25	69,3	132	16,6	4 800	5 300	0,43	► NK 85/25
	105	30	84,2	170	21,6	4 800	5 300	0,49	RNA 4915
	105	35	96,8	200	26	4 800	5 300	0,6	► NK 85/35
	105	54	130	290	37,5	4 800	5 300	0,94	RNA 6915
90	110	25	72,1	140	18	4 500	5 000	0,45	► NK 90/25
	110	30	88	183	23,2	4 500	5 000	0,52	► RNA 4916
	110	35	101	216	28	4 500	5 000	0,63	► NK 90/35
	110	54	134	315	40	4 500	5 000	0,99	► RNA 6916
95	115	26	73,7	146	18,6	4 300	4 800	0,49	NK 95/26
	115	36	105	232	30	4 300	4 800	0,68	NK 95/36
100	120	26	76,5	156	19,6	4 000	4 500	0,52	► NK 100/26
	120	35	108	250	31	4 000	4 500	0,66	RNA 4917
	120	36	108	250	31	4 000	4 500	0,72	► NK 100/36
	120	63	165	425	53	4 000	4 500	1,2	► RNA 6917
105	125	26	78,1	166	20,4	3 800	4 300	0,54	NK 105/26
	125	35	112	265	32,5	3 800	4 300	0,75	RNA 4918
	125	36	112	265	32,5	3 800	4 300	0,71	NK 105/36
	125	63	172	450	55	3 800	4 300	1,35	RNA 6918

► Popular item

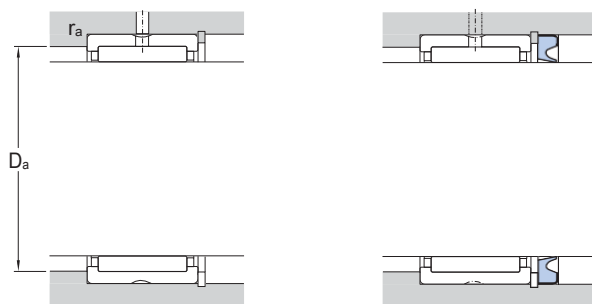


Dimensions		Abutment and illet dimensions		Associated radial shaft seals ¹⁾		
F_w	$r_{1,2}$ min	D_a max	r_a max	Single lip	Double lip	Spring loaded lip
mm		mm		–		
72	1	85	1	–	–	72x90x10 HMS5RG
	1	85	1	–	–	72x90x10 HMS5RG
73	1	85	1	–	–	–
	1	85	1	–	–	–
75	1	87	1	–	–	73x92x11 1 CRWH1R
	1	87	1	–	–	73x92x11 1 CRWH1R
	1,1	88,5	1	–	–	75x95x10 HMS5RG
80	1	90	1	–	–	80x95x10 HMS5RG
	1	90	1	–	–	80x95x10 HMS5RG
	1	95	1	–	–	80x100x10 HMS5RG
	1	95	1	–	–	80x100x10 HMS5RG
85	1	100	1	–	–	85x105x12 HMS5RG
	1	100	1	–	–	85x105x12 HMS5RG
	1	100	1	–	–	85x105x12 HMS5RG
	1	100	1	–	–	85x105x12 HMS5RG
90	1	105	1	–	–	90x110x10 HMS5RG
	1	105	1	–	–	90x110x10 HMS5RG
	1	105	1	–	–	90x110x10 HMS5RG
	1	105	1	–	–	90x110x10 HMS5RG
95	1	110	1	–	–	95x115x12 HMS5RG
	1	110	1	–	–	95x115x12 HMS5RG
100	1	115	1	–	–	100x120x10 HMS5RG
	1,1	113,5	1	–	–	100x120x10 HMS5RG
	1	115	1	–	–	100x120x10 HMS5RG
	1,1	113,5	1	–	–	100x120x10 HMS5RG
105	1	120	1	–	–	105x125x13 HMS4R
	1,1	118,5	1	–	–	105x125x13 HMS4R
	1	120	1	–	–	105x125x13 HMS4R
	1,1	118,5	1	–	–	105x125x13 HMS4R


¹⁾ For additional information → skf.com/seals

7.3 Needle roller bearings with machined rings with langes, without an inner ring

F_w **110 – 330** mm




NK
RNA48
RNA 49



RNA 69

Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designation
F _w	D	C	dynamic	static	P _u	Reference speed	Limiting speed		
mm			C	C ₀	kN	r/min		kg	–
110	130	30	96,8	220	27	3 600	4 000	0,65	► NK 110/30
	130	35	114	270	33,5	3 600	4 000	0,72	RNA 4919
	130	40	123	305	37,5	3 600	4 000	0,83	► NK 110/40
	130	63	172	465	56	3 600	4 000	1,45	► RNA 6919
115	140	40	125	280	34	3 400	4 000	1,15	RNA 4920
120	140	30	93,5	232	27	3 400	3 800	0,66	► RNA 4822
125	150	40	130	300	35,5	3 200	3 600	1,25	RNA 4922
130	150	30	99	255	29	3 200	3 600	0,73	► RNA 4824
135	165	45	176	405	49	3 000	3 400	1,85	► RNA 4924
145	165	35	119	325	36,5	2 800	3 200	0,99	RNA 4826
150	180	50	198	480	57	2 600	3 000	2,2	RNA 4926
155	175	35	121	345	37,5	2 600	3 000	0,97	► RNA 4828
160	190	50	205	510	60	2 400	2 800	2,35	RNA 4928
165	190	40	147	415	46,5	2 400	2 800	1,6	RNA 4830
175	200	40	157	450	49	2 200	2 600	1,7	► RNA 4832
185	215	45	179	520	56	2 200	2 400	2,55	RNA 4834
195	225	45	190	570	60	2 000	2 400	2,7	RNA 4836
210	240	50	220	710	73,5	1 900	2 200	3,2	► RNA 4838
220	250	50	224	735	75	1 800	2 000	3,35	RNA 4840
240	270	50	238	815	81,5	1 700	1 900	3,6	► RNA 4844
265	300	60	347	1 120	112	1 500	1 700	5,4	RNA 4848
285	320	60	358	1 200	118	1 400	1 500	5,8	RNA 4852
305	350	69	429	1 320	129	1 300	1 400	9,3	RNA 4856
330	380	80	594	1 800	173	1 100	1 300	12,5	RNA 4860

► Popular item

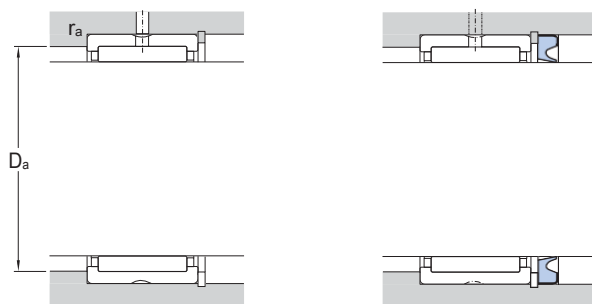


Dimensions		Abutment and illet dimensions		Associated radial shaft seals ¹⁾		
F _w	r _{1,2} min	D _a max	r _a max	Single lip	Double lip	Spring loaded lip
mm		mm		–		
110	1,1	123,5	1	–	–	110x130x12 HMS5RG
	1,1	123,5	1	–	–	110x130x12 HMS5RG
	1,1	123,5	1	–	–	110x130x12 HMS5RG
	1,1	123,5	1	–	–	110x130x12 HMS5RG
115	1,1	133,5	1	–	–	115x140x12 HMS5RG
120	1	135	1	–	–	120x140x12 HMS5RG
125	1,1	143,5	1	–	–	125x150x12 HMS5RG
130	1	145	1	–	–	130x150x10 CRSA1R
135	1,1	158,5	1	–	–	135x165x14 HMSA7R
145	1,1	158,5	1	–	–	–
150	1,5	172	1,5	–	–	150x180x12 HMS5RG
155	1,1	168,5	1	–	–	–
160	1,5	182	1,5	–	–	160x190x15 HMS5RG
165	1,1	183,5	1	–	–	165x190x15 HMS5RG
175	1,1	193,5	1	–	–	175x200x15 HMS5RG
185	1,1	208,5	1	–	–	185x215x15 HMS42R
195	1,1	218,5	1	–	–	–
210	1,5	232	1,5	–	–	210x240x15 HMS5RG
220	1,5	242	1,5	–	–	220x250x15 HMS5RG
240	1,5	262	1,5	–	–	240x270x15 HMS5RG
265	2	291	2	–	–	Available on request
285	2	311	2	–	–	285x320x16 HDS2R
305	2	341	2	–	–	Available on request
330	2,1	369	2	–	–	Available on request


¹⁾ For additional information → skf.com/seals

7.4 Needle roller bearings with machined rings with langes, with an inner ring


d 5 – 17 mm



NKI ($d \leq 7$ mm)




NKI(S) ($d \geq 9$ mm)
NA 49
NA 69



NA 49 ...2RS

Principal dimensions				Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designation
d	D	B	C	C	C ₀	P _u	Reference speed	Limiting speed		
mm				kN		kN	r/min		kg	–
5	15	12	–	3,8	4,25	0,465	32 000	36 000	0,012	► NKI 5/12 TN
	15	16	–	5,01	5,85	0,67	32 000	36 000	0,015	► NKI 5/16 TN
6	16	12	–	4,4	5,2	0,57	30 000	34 000	0,014	► NKI 6/12 TN
	16	16	–	5,72	7,2	0,815	30 000	34 000	0,017	► NKI 6/16 TN
7	17	12	–	4,57	5,7	0,63	28 000	32 000	0,014	► NKI 7/12 TN
	17	16	–	5,94	8	0,9	28 000	32 000	0,018	► NKI 7/16 TN
9	19	12	–	6,71	8,15	0,965	26 000	30 000	0,017	► NKI 9/12
	19	16	–	9,13	12	1,43	26 000	30 000	0,022	► NKI 9/16
10	22	13	–	8,8	10,4	1,22	24 000	28 000	0,024	► NA 4900
	22	14	13	7,37	8,15	0,965	–	12 000	0,025	► NA 4900.2RS
	22	16	–	10,2	12,5	1,5	24 000	28 000	0,029	► NKI 10/16
	22	20	–	12,8	16,6	2	24 000	28 000	0,037	► NKI 10/20
12	24	13	–	9,9	12,2	1,46	22 000	26 000	0,026	► NA 4901
	24	14	13	8,09	9,65	1,14	–	11 000	0,028	► NA 4901.2RS
	24	16	–	11,7	15,3	1,8	22 000	26 000	0,033	► NKI 12/16
	24	20	–	14,5	20	2,4	22 000	26 000	0,042	► NKI 12/20
	24	22	–	16,1	23,2	2,75	22 000	26 000	0,046	► NA 6901
15	27	16	–	13,4	19	2,28	20 000	24 000	0,039	► NKI 15/16
	27	20	–	16,5	25,5	3,05	20 000	24 000	0,049	► NKI 15/20
	28	13	–	11,2	15,3	1,83	19 000	22 000	0,034	► NA 4902
	28	14	13	9,13	12	1,43	–	9 500	0,037	► NA 4902.2RS
	28	23	–	17,2	27	3,35	19 000	22 000	0,064	► NA 6902
	35	20	–	24,6	30	3,65	16 000	19 000	0,092	► NKIS 15
17	29	16	–	13,8	20,4	2,45	19 000	22 000	0,042	► NKI 17/16
	29	20	–	17,2	27	3,35	19 000	22 000	0,053	► NKI 17/20
	30	13	–	11,4	16,3	1,96	18 000	20 000	0,038	► NA 4903
	30	14	13	9,52	12,9	1,53	–	9 000	0,04	► NA 4903.2RS
	30	23	–	18,7	30,5	3,75	18 000	20 000	0,072	► NA 6903
	37	20	–	26	33,5	4	15 000	17 000	0,098	► NKIS 17

► Popular item






Dimensions Abutment and illet dimensions

d	F	r _{1,2} min	s max	d _a min	D _a max	r _a max
mm				mm		
5	8	0,3	1,5	7	13	0,3
	8	0,3	2	7	13	0,3
6	9	0,3	1,5	8	14	0,3
	9	0,3	2	8	14	0,3
7	10	0,3	1,5	9	15	0,3
	10	0,3	2	9	15	0,3
9	12	0,3	1,5	11	17	0,3
	12	0,3	2	11	17	0,3
10	14	0,3	0,5	12	20	0,3
	14	0,3	0,5	12	20	0,3
	14	0,3	0,5	12	20	0,3
	14	0,3	0,5	12	20	0,3
12	16	0,3	0,5	14	22	0,3
	16	0,3	0,5	14	22	0,3
	16	0,3	0,5	14	22	0,3
	16	0,3	0,5	14	22	0,3
	16	0,3	1	14	22	0,3
15	19	0,3	0,5	17	25	0,3
	19	0,3	0,5	17	25	0,3
	20	0,3	0,5	17	26	0,3
	20	0,3	0,5	17	26	0,3
	20	0,3	1	17	26	0,3
	22	0,6	0,5	19	31	0,6
17	21	0,3	0,5	19	27	0,3
	21	0,3	0,5	19	27	0,3
	22	0,3	0,5	19	28	0,3
	22	0,3	0,5	19	28	0,3
	22	0,3	1	19	28	0,3
	24	0,6	0,5	21	33	0,6

7.4 Needle roller bearings with machined rings with langes, with an inner ring

d 20 – 32 mm




NA 49...2RS

NA 69 (d ≥ 32 mm)

Principal dimensions				Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designation
d	D	B	C	C	C ₀	P _u	Reference speed	Limiting speed		
mm				kN		kN	r/min		kg	–
20	32	16	–	15,4	24,5	2,9	16 000	19 000	0,048	► NKI 20/16
	32	20	–	19	32,5	4	16 000	19 000	0,06	► NKI 20/20
	37	17	–	21,6	28	3,35	15 000	17 000	0,075	► NA 4904
	37	18	17	19,4	22,4	2,65	–	7 500	0,08	► NA 4904.2RS
	37	30	–	35,2	53	6,55	15 000	17 000	0,14	► NA 6904
	42	20	–	28,6	39	4,75	13 000	15 000	0,13	► NKIS 20
22	34	16	–	15,7	26	3,1	15 000	17 000	0,052	► NKI 22/16
	34	20	–	19,4	34,5	4,25	15 000	17 000	0,065	► NKI 22/20
	39	17	–	23,3	32	3,9	14 000	15 000	0,08	► NA 49/22
	39	30	–	36,9	57	7,2	14 000	15 000	0,15	► NA 69/22
25	38	20	–	24,6	42,5	5,2	14 000	15 000	0,08	► NKI 25/20 TN
	38	30	–	31,9	60	7,5	14 000	15 000	0,12	► NKI 25/30
	42	17	–	24,2	34,5	4,15	13 000	15 000	0,088	► NA 4905
	42	18	17	21,6	27,5	3,25	–	6 300	0,09	► NA 4905.2RS
	42	30	–	38	62	7,65	13 000	15 000	0,16	► NA 6905
	47	22	–	34,1	46,5	5,7	12 000	13 000	0,16	► NKIS 25
28	42	20	–	26,4	48	6	12 000	14 000	0,092	► NKI 28/20 TN
	42	30	–	34,1	65,5	8,3	12 000	14 000	0,14	► NKI 28/30
	45	17	–	25,1	36,5	4,4	12 000	14 000	0,098	► NA 49/28
	45	30	–	39,6	65,5	8,3	12 000	14 000	0,18	► NA 69/28
30	45	20	–	27,5	52	6,55	11 000	13 000	0,11	► NKI 30/20 TN
	45	30	–	40,2	85	10,6	11 000	13 000	0,17	► NKI 30/30 TN
	47	17	–	25,5	39	4,65	11 000	13 000	0,1	► NA 4906
	47	18	17	23,3	32	3,8	–	5 600	0,1	► NA 4906.2RS
	47	30	–	42,9	75	9,3	11 000	13 000	0,19	► NA 6906
	52	22	–	36,9	54	6,55	10 000	12 000	0,18	► NKIS 30
32	47	20	–	25,1	46,5	5,85	11 000	12 000	0,11	► NKI 32/20
	47	30	–	36,9	76,5	9,5	11 000	12 000	0,17	► NKI 32/30
	52	20	–	30,8	51	6,3	10 000	11 000	0,16	► NA 49/32
	52	36	–	47,3	90	10,8	10 000	11 000	0,29	► NA 69/32

► Popular item




Dimensions

Abutment and illet dimensions


d	F	r _{1,2} min	s max	d _a min	D _a max	r _a max
mm				mm		
20	24	0,3	0,5	22	30	0,3
	24	0,3	0,5	22	30	0,3
	25	0,3	0,8	22	35	0,3
	25	0,3	0,5	22	35	0,3
	25	0,3	1	22	35	0,3
	28	0,6	0,5	24	38	0,6
22	26	0,3	0,5	24	32	0,3
	26	0,3	0,5	24	32	0,3
	28	0,3	0,8	24	37	0,3
	28	0,3	0,5	24	37	0,3
25	29	0,3	1	27	36	0,3
	29	0,3	1,5	27	36	0,3
	30	0,3	0,8	27	40	0,3
	30	0,3	0,5	27	40	0,3
	30	0,3	1	27	40	0,3
	32	0,6	1	29	43	0,6
28	32	0,3	1	30	40	0,3
	32	0,3	1,5	30	40	0,3
	32	0,3	0,8	30	43	0,3
	32	0,3	1	30	43	0,3
30	35	0,3	0,5	32	43	0,3
	35	0,3	1	32	43	0,3
	35	0,3	0,8	32	45	0,3
	35	0,3	0,5	32	45	0,3
	35	0,3	1	32	45	0,3
	37	0,6	1	34	48	0,6
32	37	0,3	0,5	34	45	0,3
	37	0,3	1	34	45	0,3
	40	0,6	0,8	36	48	0,6
	40	0,6	0,5	36	48	0,6

7.4 Needle roller bearings with machined rings with langes, with an inner ring


d 35 – 55 mm



NKI(S)
NA 49




NA49...2RS



NA 69

Principal dimensions				Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designation
d	D	B	C	C	C ₀	P _u	Reference speed	Limiting speed		
mm				kN		kN	r/min		kg	–
35	50	20	–	29,7	60	7,5	10 000	11 000	0,12	► NKI 35/20 TN
	50	30	–	38	83	10,4	10 000	11 000	0,19	► NKI 35/30
	55	20	–	31,9	54	6,7	9 500	11 000	0,17	► NA 4907
	55	21	20	27	43	5,3	–	4 800	0,18	► NA 4907.2RS
	55	36	–	48,4	93	11,4	9 500	11 000	0,31	► NA 6907
	58	22	–	39,1	61	7,5	9 000	10 000	0,22	NKIS 35
38	53	20	–	27,5	55	6,8	9 500	11 000	0,13	NKI 38/20
	53	30	–	40,2	90	11,2	9 500	11 000	0,21	► NKI 38/30
40	55	20	–	31,4	65,5	8,3	9 000	10 000	0,14	► NKI 40/20 TN
	55	30	–	45,7	108	13,7	9 000	10 000	0,22	► NKI 40/30 TN
	62	22	–	42,9	71	8,8	8 000	9 500	0,23	► NA 4908
	62	23	22	36,9	58,5	7,1	–	4 000	0,25	► NA 4908.2RS
	62	40	–	67,1	125	15,3	8 000	9 500	0,43	► NA 6908
	65	22	–	42,9	72	8,8	8 000	9 000	0,28	NKIS 40
42	57	20	–	29,2	61	7,65	8 500	10 000	0,14	NKI 42/20
	57	30	–	41,8	98	12,5	8 500	10 000	0,22	NKI 42/30
45	62	25	–	42,9	91,5	11,2	8 000	9 000	0,22	► NKI 45/25 TN
	62	35	–	58,3	137	17	8 000	9 000	0,31	► NKI 45/35 TN
	68	22	–	45,7	78	9,65	7 500	8 500	0,27	► NA 4909
	68	23	22	39,1	64	7,8	–	3 800	0,29	► NA 4909.2RS
	68	40	–	70,4	137	17	7 500	8 500	0,5	► NA 6909
	72	22	–	44,6	78	9,8	7 000	8 000	0,34	► NKIS 45
50	68	25	–	40,2	88	10,8	7 500	8 500	0,26	► NKI 50/25
	68	35	–	52,3	122	15,3	7 500	8 500	0,36	► NKI 50/35
	72	22	–	47,3	85	10,6	7 000	8 000	0,27	► NA 4910
	72	23	22	40,2	69,5	8,5	–	3 400	0,3	► NA 4910.2RS
	72	40	–	73,7	150	18,6	7 000	8 000	0,52	► NA 6910
	80	28	–	62,7	104	13,2	6 300	7 500	0,52	► NKIS 50
55	72	25	–	46,8	110	13,4	6 700	7 500	0,26	► NKI 55/25 TN
	72	35	–	55	134	17	6 700	7 500	0,36	► NKI 55/35
	80	25	–	57,2	106	13,2	6 300	7 000	0,39	► NA 4911
	80	45	–	89,7	190	23,2	6 300	7 000	0,78	► NA 6911
	85	28	–	66	114	14,6	6 000	6 700	0,56	NKIS 55

► Popular item




Dimensions

Abutment and illet dimensions


d	F	r _{1,2} min	s max	d _a min	D _a max	r _a max
mm				mm		
35	40	0,3	0,5	37	48	0,3
	40	0,3	1	37	48	0,3
	42	0,6	0,8	39	51	0,6
	42	0,6	0,5	39	51	0,6
	42	0,6	0,5	39	51	0,6
	43	0,6	0,5	39	53	0,6
38	43	0,3	0,5	40	51	0,3
	43	0,3	1	40	51	0,3
40	45	0,3	0,5	42	53	0,3
	45	0,3	1	42	53	0,3
	48	0,6	1	44	58	0,6
	48	0,6	0,5	44	58	0,6
	48	0,6	0,5	44	58	0,6
	50	1	0,5	45	60	1
42	47	0,3	0,5	44	55	0,3
	47	0,3	1	44	55	0,3
45	50	0,6	1,5	49	58	0,6
	50	0,6	2	49	58	0,6
	52	0,6	1	49	64	0,6
	52	0,6	0,5	49	64	0,6
	52	0,6	0,5	49	64	0,6
	55	1	0,5	50	67	1
50	55	0,6	1,5	54	64	0,6
	55	0,6	2	54	64	0,6
	58	0,6	1	54	68	0,6
	58	0,6	0,5	54	68	0,6
	58	0,6	0,5	54	68	0,6
	60	1,1	2	56,5	73,5	1
55	60	0,6	1,5	59	68	0,6
	60	0,6	2	59	68	0,6
	63	1	1,5	60	75	1
	63	1	1,5	60	75	1
	65	1,1	2	61,5	78,5	1

7.4 Needle roller bearings with machined rings with langes, with an inner ring

d 60 – 90 mm




NKI(S)
NA 49



NA 69

Principal dimensions				Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designation
d	D	B	C	C	C ₀	P _u	Reference speed	Limiting speed		
mm				kN		kN	r/min		kg	–
60	82	25	–	44	95	11,8	6 000	6 700	0,39	► NKI 60/25
	82	35	–	60,5	146	18,3	6 000	6 700	0,55	► NKI 60/35
	85	25	–	60,5	114	14,3	6 000	6 700	0,43	► NA 4912
	85	45	–	93,5	204	25	6 000	6 700	0,81	► NA 6912
	90	28	–	68,2	120	15,3	5 600	6 300	0,56	► NKIS 60
65	90	25	–	52,8	106	13,2	5 600	6 300	0,46	NKI 65/25
	90	25	–	61,6	120	14,6	5 600	6 300	0,46	► NA 4913
	90	35	–	73,7	163	20,4	5 600	6 300	0,66	► NKI 65/35
	90	45	–	95,2	212	26	5 600	6 300	0,83	► NA 6913
	95	28	–	70,4	132	16,6	5 300	6 000	0,64	► NKIS 65
70	95	25	–	56,1	127	15,6	5 000	5 600	0,51	NKI 70/25
	95	35	–	76,5	190	24	5 000	5 600	0,72	► NKI 70/35
	100	30	–	84,2	163	20,8	5 000	5 600	0,73	► NA 4914
	100	54	–	128	285	36	5 000	5 600	1,35	► NA 6914
75	105	25	–	69,3	132	16,6	4 800	5 300	0,64	► NKI 75/25
	105	30	–	84,2	170	21,6	4 800	5 300	0,78	► NA 4915
	105	35	–	96,8	200	26	4 800	5 300	0,91	► NKI 75/35
	105	54	–	130	290	37,5	4 800	5 300	1,45	► NA 6915
80	110	25	–	72,1	140	18	4 500	5 000	0,68	► NKI 80/25
	110	30	–	88	183	23,2	4 500	5 000	0,88	► NA 4916
	110	35	–	101	216	28	4 500	5 000	0,96	► NKI 80/35
	110	54	–	134	315	40	4 500	5 000	1,5	► NA 6916
85	115	26	–	73,7	146	18,6	4 300	4 800	0,74	► NKI 85/26
	115	36	–	105	232	30	4 300	4 800	1,05	► NKI 85/36
	120	35	–	108	250	31	4 000	4 500	1,25	► NA 4917
	120	63	–	165	425	53	4 000	4 500	2,2	► NA 6917
90	120	26	–	76,5	156	19,6	4 000	4 500	0,78	► NKI 90/26
	120	36	–	108	250	31	4 000	4 500	1,1	► NKI 90/36
	125	35	–	112	265	32,5	3 800	4 300	1,3	► NA 4918
	125	63	–	172	450	55	3 800	4 300	2,3	► NA 6918

► Popular item



Dimensions

Abutment and illet dimensions


d	F	r _{1,2} min	s max	d _a min	D _a max	r _a max
mm				mm		
60	68	0,6	1	64	78	0,6
	68	0,6	1	64	78	0,6
	68	1	1,5	65	80	1
	68	1	1,5	65	80	1
	70	1,1	2	66,5	83,5	1
65	73	1	1	70	85	1
	72	1	1,5	70	85	1
	73	1	1	70	85	1
	72	1	1,5	70	85	1
	75	1,1	2	71,5	88,5	1
70	80	1	0,8	75	90	1
	80	1	0,8	75	90	1
	80	1	1,5	75	95	1
	80	1	1	75	95	1
75	85	1	1	80	100	1
	85	1	1,5	80	100	1
	85	1	1	80	100	1
	85	1	1	80	100	1
80	90	1	1	85	105	1
	90	1	1,5	85	105	1
	90	1	1	85	105	1
	90	1	1	85	105	1
85	95	1	1,5	90	110	1
	95	1	1,5	90	110	1
	100	1,1	1	91,5	113,5	1
	100	1,1	1	91,5	113,5	1
90	100	1	1,5	95	115	1
	100	1	1,5	95	115	1
	105	1,1	1	96,5	118,5	1
	105	1,1	1	96,5	118,5	1

7.4




7.4 Needle roller bearings with machined rings with langes, with an inner ring

d 95 – 320 mm




NKI
NA 48
NA 49



NA 69

Principal dimensions				Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designation
d	D	B	C	C	C ₀	P _u	Reference speed	Limiting speed		
mm				kN		kN	r/min		kg	–
95	125	26	–	78,1	166	20,4	3 800	4 300	0,82	► NKI 95/26
	125	36	–	112	265	32,5	3 800	4 300	1,15	► NKI 95/36
	130	35	–	114	270	33,5	3 600	4 000	1,35	► NA 4919
	130	63	–	172	465	56	3 600	4 000	2,5	► NA 6919
100	130	30	–	96,8	220	27	3 600	4 000	0,99	► NKI 100/30
	130	40	–	123	305	37,5	3 600	4 000	1,35	► NKI 100/40
	140	40	–	125	280	34	3 400	4 000	1,9	► NA 4920
110	140	30	–	93,5	232	27	3 400	3 800	1,1	► NA 4822
	150	40	–	130	300	35,5	3 200	3 600	2,05	► NA 4922
120	150	30	–	99	255	29	3 200	3 600	1,15	► NA 4824
	165	45	–	176	405	49	3 000	3 400	2,85	► NA 4924
130	165	35	–	119	325	36,5	2 800	3 200	1,8	► NA 4826
	180	50	–	198	480	57	2 600	3 000	3,9	► NA 4926
140	175	35	–	121	345	37,5	2 600	3 000	1,9	► NA 4828
	190	50	–	205	510	60	2 400	2 800	4,15	► NA 4928
150	190	40	–	147	415	46,5	2 400	2 800	2,7	► NA 4830
160	200	40	–	157	450	49	2 200	2 600	2,85	► NA 4832
170	215	45	–	179	520	56	2 200	2 400	3,95	► NA 4834
180	225	45	–	190	570	60	2 000	2 400	4,2	► NA 4836
190	240	50	–	220	710	73,5	1 900	2 200	5,55	► NA 4838
200	250	50	–	224	735	75	1 800	2 000	5,8	► NA 4840
220	270	50	–	238	815	81,5	1 700	1 900	6,35	► NA 4844
240	300	60	–	347	1 120	112	1 500	1 700	9,9	► NA 4848
260	320	60	–	358	1 200	118	1 400	1 500	10,5	► NA 4852
280	350	69	–	429	1 320	129	1 300	1 400	15,5	► NA 4856
300	380	80	–	594	1 800	173	1 100	1 300	22	NA 4860
320	400	80	–	605	1 900	176	1 100	1 200	23	NA 4864

► Popular item




Dimensions

Abutment and illet dimensions

d	F	r _{1,2} min	s max	d _a min	D _a max	r _a max
mm				mm		
95	105	1	1,5	100	120	1
	105	1	1,5	100	120	1
	110	1,1	1	101,5	123,5	1
	110	1,1	1	101,5	123,5	1
100	110	1,1	1,5	106,5	123,5	1
	110	1,1	2	106,5	123,5	1
	115	1,1	2	106,5	133,5	1
110	120	1	0,8	115	135	1
	125	1,1	2	116,5	143,5	1
120	130	1	0,8	125	145	1
	135	1,1	2	126,5	158,5	1
130	145	1,1	1	136,5	158,5	1
	150	1,5	1,5	138	172	1,5
140	155	1,1	1	146,5	168,5	1
	160	1,5	1,5	148	182	1,5
150	165	1,1	1,5	156,5	183,5	1
160	175	1,1	1,5	166,5	193,5	1
170	185	1,1	1,5	176,5	208,5	1
180	195	1,1	1,5	186,5	218,5	1
190	210	1,5	1,5	198	232	1,5
200	220	1,5	1,5	208	242	1,5
220	240	1,5	1,5	228	262	1,5
240	265	2	2	249	291	2
260	285	2	2	269	311	2
280	305	2	2,5	289	341	2
300	330	2,1	2	311	369	2
320	350	2,1	2	331	389	2

7.4 Needle roller bearings with machined rings with langes, with an inner ring


d 340 – 380 mm

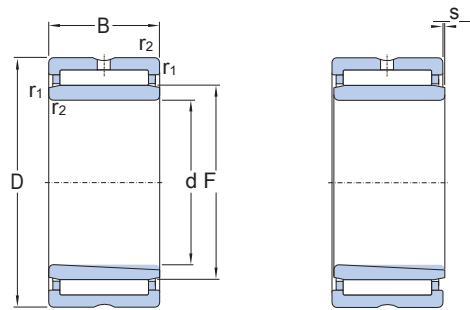

Principal dimensions				Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designation
d	D	B	C	C	C ₀	P _u	Reference speed	Limiting speed		
mm				kN		kN	r/min		kg	–
340	420	80	–	616	1 960	183	1 000	1 200	24	NA 4868
360	440	80	–	627	2 040	186	950	1 100	25,5	NA 4872
380	480	100	–	968	3 000	270	900	1 000	42,5	NA 4876

7.4





Dimensions

Abutment and illet dimensions

d	F	$r_{1,2}$ min	s max	d_a min	D_a max	r_a max
---	---	------------------	----------	--------------	--------------	--------------


mm

mm

340	370	2,1	2	351	409	2
360	390	2,1	2	371	429	2
380	415	2,1	2	391	469	2


7.5 Alignment needle roller bearings, without an inner ring

F_w 15 – 45 mm



Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designation
F _w	D	C	C	C ₀	P _u	Reference speed	Limiting speed		
mm			kN		kN	r/min		kg	–
15	28	12	7,37	9,15	1,08	24 000	28 000	0,032	RPNA 15/28
18	32	16	12,8	17,6	2,12	22 000	24 000	0,052	RPNA 18/32
20	35	16	13,2	19,3	2,28	19 000	22 000	0,062	► RPNA 20/35
25	42	20	19	32,5	4	16 000	18 000	0,11	► RPNA 25/42
30	47	20	22,9	38	4,8	13 000	15 000	0,13	► RPNA 30/47
35	52	20	24,6	45	5,6	11 000	13 000	0,13	► RPNA 35/52
40	55	20	26,4	51	6,3	10 000	11 000	0,14	RPNA 40/55
45	62	20	27,5	57	7,1	9 000	10 000	0,18	► RPNA 45/62

► Popular item



Dimensions

Abutment and illetdimensions

F_w D_1 r_{min} $D_{a_{min}}$ $D_{a_{max}}$ $r_{a_{max}}$


mm

mm

15	24,5	0,8	23,5	24,5	0,8
18	27	0,8	26	27	0,8
20	30,5	0,8	29,5	30,5	0,8
25	36,5	0,8	35	37	0,8
30	42	0,8	41	42	0,8
35	47,5	0,8	46,5	47,5	0,8
40	50,5	0,8	49,5	50,5	0,8
45	58	0,8	57	58	0,8


7.6 Alignment needle roller bearings, with an inner ring

d 12 – 40 mm

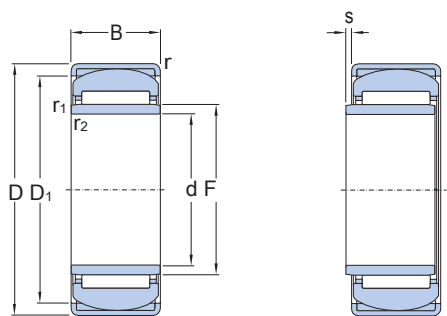

Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designation
d	D	B	dynamic	static		Reference speed	Limiting speed		
mm			kN		kN	r/min		kg	–
12	28	12	7,37	9,15	1,08	24 000	28 000	0,037	PNA 12/28
15	32	16	12,8	17,6	2,12	22 000	24 000	0,062	► PNA 15/32
17	35	16	13,2	19,3	2,28	19 000	22 000	0,073	► PNA 17/35
20	42	20	19	32,5	4	16 000	18 000	0,14	► PNA 20/42
22	44	20	22	36,5	4,55	14 000	16 000	0,15	PNA 22/44
25	47	20	22,9	38	4,8	13 000	15 000	0,16	PNA 25/47
30	52	20	24,6	45	5,6	11 000	13 000	0,18	► PNA 30/52
35	55	20	26,4	51	6,3	10 000	11 000	0,18	► PNA 35/55
40	62	20	27,5	57	7,1	9 000	10 000	0,23	► PNA 40/62

► Popular item




Dimensions

Abutment and illet dimensions

d	F	D ₁	r _{min}	r _{1,2 min}	s _{max}	d _{a min}	D _{a min}	D _{a max}	r _{a max}	r _{b max}
mm						mm				
12	15	24,5	0,8	0,3	0,5	14	23,5	24,5	0,8	0,3
15	18	27	0,8	0,3	0,5	17	26	27	0,8	0,3
17	20	30,5	0,8	0,3	0,5	19	29,5	30,5	0,8	0,3
20	25	36,5	0,8	0,3	0,5	22	35	37	0,8	0,3
22	28	38,5	0,8	0,3	0,5	24	37,5	39	0,8	0,3
25	30	42	0,8	0,3	0,5	25	41	42	0,8	0,3
30	35	47,5	0,8	0,3	0,5	32	46,5	47,5	0,8	0,3
35	40	50,5	0,8	0,3	0,5	37	49,5	50,5	0,8	0,3
40	45	58	0,8	0,3	0,5	42	57	58	0,8	0,3

7.7 Needle roller / angular contact ball bearings

d 12 – 70 mm

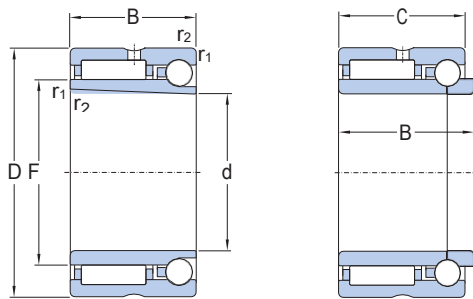


NKIA

NKIB

Principal dimensions				Basic load ratings				Fatigue load limit		Speed ratings		Mass	Designation
d	D	B	C	radial dynamic C	static C ₀	axial dynamic C	static C ₀	radial P _u	axial P _u	Reference speed	Limiting speed		
mm				kN				kN		r/min		kg	–
12	24	16	–	8,09	9,65	2,07	1,92	1,14	0,083	22 000	26 000	0,04	► NKIA 5901
	24	17,5	16	8,09	9,65	2,07	1,92	1,14	0,083	22 000	26 000	0,043	► NKIB 5901
15	28	18	–	11,2	15,3	2,27	2,37	1,83	0,099	19 000	22 000	0,05	► NKIA 5902
	28	20	18	11,2	15,3	2,27	2,37	1,83	0,099	19 000	22 000	0,052	► NKIB 5902
17	30	18	–	11,4	16,3	2,24	2,74	1,96	0,116	18 000	20 000	0,056	► NKIA 5903
	30	20	18	11,4	16,3	2,24	2,74	1,96	0,116	18 000	20 000	0,058	► NKIB 5903
20	37	23	–	21,6	28	3,79	4,21	3,35	0,176	15 000	17 000	0,1	► NKIA 5904
	37	25	23	21,6	28	3,79	4,21	3,35	0,176	15 000	17 000	0,11	► NKIB 5904
22	39	23	–	23,3	32	4,14	4,93	3,9	0,205	14 000	15 000	0,12	NKIA 59/22
	39	25	23	23,3	32	4,14	4,93	3,9	0,205	14 000	15 000	0,12	► NKIB 59/22
25	42	23	–	24,2	34,5	4,24	5,26	4,15	0,224	13 000	15 000	0,13	► NKIA 5905
	42	25	23	24,2	34,5	4,24	5,26	4,15	0,224	13 000	15 000	0,13	► NKIB 5905
30	47	23	–	25,5	39	4,54	6,32	4,65	0,268	11 000	13 000	0,15	► NKIA 5906
	47	25	23	25,5	39	4,54	6,32	4,65	0,268	11 000	13 000	0,15	► NKIB 5906
35	55	27	–	31,9	54	5,83	8,42	6,7	0,355	9 500	11 000	0,24	► NKIA 5907
	55	30	27	31,9	54	5,83	8,42	6,7	0,355	9 500	11 000	0,25	► NKIB 5907
40	62	30	–	42,9	71	7,17	10,9	8,8	0,467	8 000	9 500	0,32	► NKIA 5908
	62	34	30	42,9	71	7,17	10,9	8,8	0,467	8 000	9 500	0,32	► NKIB 5908
45	68	30	–	45,7	78	7,47	12	9,65	0,513	7 500	8 500	0,38	NKIA 5909
	68	34	30	45,7	78	7,47	12	9,65	0,513	7 500	8 500	0,38	► NKIB 5909
50	72	30	–	47,3	85	7,74	13,7	10,6	0,579	7 000	8 000	0,38	► NKIA 5910
	72	34	30	47,3	85	7,74	13,7	10,6	0,579	7 000	8 000	0,39	► NKIB 5910
55	80	34	–	57,2	106	9,27	16,7	13,2	0,697	6 300	7 000	0,55	NKIA 5911
	80	38	34	57,2	106	9,27	16,7	13,2	0,697	6 300	7 000	0,56	► NKIB 5911
60	85	34	–	60,5	114	9,58	18	14,3	0,77	6 000	6 700	0,59	► NKIA 5912
	85	38	34	60,5	114	9,58	18	14,3	0,77	6 000	6 700	0,6	► NKIB 5912
65	90	34	–	61,6	120	9,96	19,2	14,6	0,816	5 600	6 300	0,64	NKIA 5913
	90	38	34	61,6	120	9,96	19,2	14,6	0,816	5 600	6 300	0,64	► NKIB 5913
70	100	40	–	84,2	163	13,2	25	20,8	1,05	5 000	5 600	0,98	NKIA 5914
	100	45	40	84,2	163	13,2	25	20,8	1,05	5 000	5 600	0,99	► NKIB 5914

► Popular item

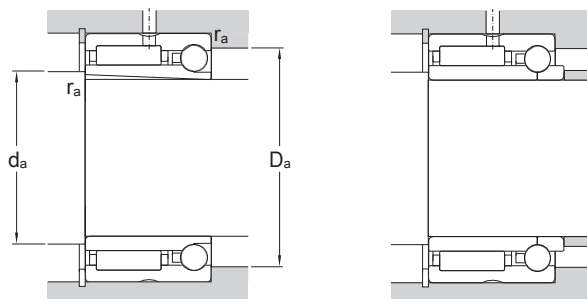


Dimensions

Abutment and illetdimensions


d	F	r _{1,2} min	d _a min	D _a max	r _a max
mm			mm		
12	16	0,3	14	22	0,3
	16	0,3	14	22	0,3
15	20	0,3	17	26	0,3
	20	0,3	17	26	0,3
17	22	0,3	19	28	0,3
	22	0,3	19	28	0,3
20	25	0,3	22	35	0,3
	25	0,3	22	35	0,3
22	28	0,3	24	37	0,3
	28	0,3	24	37	0,3
25	30	0,3	27	40	0,3
	30	0,3	27	40	0,3
30	35	0,3	32	45	0,3
	35	0,3	32	45	0,3
35	42	0,6	39	51	0,6
	42	0,6	39	51	0,6
40	48	0,6	44	58	0,6
	48	0,6	44	58	0,6
45	52	0,6	49	64	0,6
	52	0,6	49	64	0,6
50	58	0,6	54	68	0,6
	58	0,6	54	68	0,6
55	63	1	60	75	1
	63	1	60	75	1
60	68	1	65	80	1
	68	1	65	80	1
65	72	1	70	85	1
	72	1	70	85	1
70	80	1	75	95	1
	80	1	75	95	1

7.8 Needle roller / thrust ball bearings, full complement thrust bearing


F_w 7 – 35 mm




NX
($F_w = 7$ mm)



NX Z
($F_w = 7$ mm)




NX
($F_w \geq 10$ mm)



NX Z
($F_w \geq 10$ mm)

Principal dimensions			Basic load ratings				Fatigue load limit		Minimum load factor	Speed ratings		Mass	Designation
F_w	D	C	radial dynamic C	static C_0	axial dynamic C	static C_0	radial P_u	axial P_u	A	Reference speed	Limiting speed	kg	
mm			kN				kN		–	r/min			–
7	14	18	2,81	2,75	3,45	5	0,29	0,186	0,00013	10 000	6 000	0,014	► NX 7 ZTN
	14	18	2,81	2,75	3,45	5	0,29	0,186	0,00013	10 000	11 000	0,014	NX 7 TN
10	19	18	4,95	4,55	5,07	8,5	0,53	0,31	0,00038	8 500	5 600	0,025	► NX 10 Z
	19	18	4,95	4,55	5,07	8,5	0,53	0,31	0,00038	8 500	9 500	0,025	NX 10
12	21	18	5,39	5,2	5,27	9,65	0,61	0,355	0,00048	8 000	5 300	0,028	► NX 12 Z
	21	18	5,39	5,2	5,27	9,65	0,61	0,355	0,00048	8 000	9 000	0,028	NX 12
15	24	28	11	14	6,18	12,2	1,66	0,45	0,00077	7 500	5 300	0,048	NX 15 Z
	24	28	11	14	6,18	12,2	1,66	0,45	0,00077	7 500	8 500	0,048	NX 15
17	26	28	12,1	16,6	6,37	13,4	1,96	0,5	0,00093	7 000	5 000	0,053	NX 17 Z
	26	28	12,1	16,6	6,37	13,4	1,96	0,5	0,00093	7 000	8 500	0,053	NX 17
20	30	28	13,2	19,3	7,8	17,3	2,28	0,64	0,0016	6 300	4 500	0,068	► NX 20 Z
	30	28	13,2	19,3	7,8	17,3	2,28	0,64	0,0016	6 300	7 500	0,068	NX 20
25	37	30	15,1	24,5	12,4	28,5	2,9	1,06	0,0042	5 600	3 800	0,12	NX 25 Z
	37	30	15,1	24,5	12,4	28,5	2,9	1,06	0,0042	5 600	6 300	0,12	NX 25
30	42	30	22,9	38	12,7	32,5	4,8	1,2	0,0055	5 300	3 600	0,13	► NX 30 Z
	42	30	22,9	38	12,7	32,5	4,8	1,2	0,0055	5 300	6 000	0,13	NX 30
35	47	30	24,6	45	13,5	38	5,6	1,4	0,0075	5 000	3 400	0,16	NX 35 Z
	47	30	24,6	45	13,5	38	5,6	1,4	0,0075	5 000	5 600	0,16	NX 35

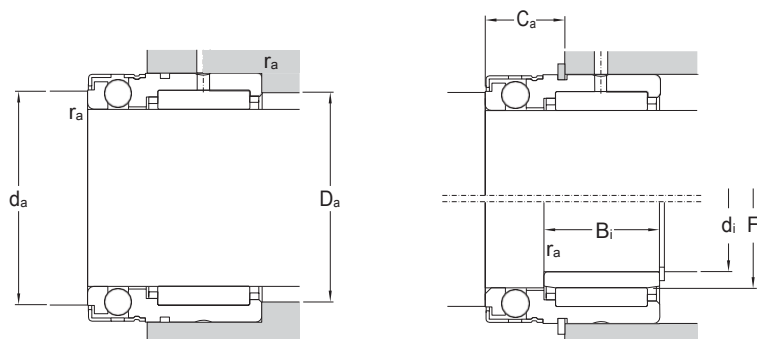


Dimensions				Abutment and illet dimensions				Associated innerring ¹⁾			Designation	Associated snap ring ²⁾
F _w	C ₁	d	r _{1,2} min	d _a min	D _a max	C _a	r _a max	d _i	F	B _i		
mm				mm				mm			–	–
7	4,7	7	0,3	9,6	12	10	0,3	–	–	–	–	SW 14
	4,7	7	0,3	9,6	12	10	0,3	–	–	–	–	SW 14
10	4,7	10	0,3	14,6	17	10	0,3	6	10	10	IR 6x10x10 IS1	SW 19
	4,7	10	0,3	14,6	17	10	0,3	6	10	10	IR 6x10x10 IS1	SW 19
12	4,7	12	0,3	16,6	19	10	0,3	8	12	10	IR 8x12x10 IS1	SW 21
	4,7	12	0,3	16,6	19	10	0,3	8	12	10	IR 8x12x10 IS1	SW 21
15	8	15	0,3	19	22	12,2	0,3	12	15	16	IR 12x15x16	SW 24
	8	15	0,3	19	22	12,2	0,3	12	15	16	IR 12x15x16	SW 24
17	8	17	0,3	21	24	12,2	0,3	14	17	17	IR 14x17x17	SW 26
	8	17	0,3	21	24	12,2	0,3	14	17	17	IR 14x17x17	SW 26
20	8	20	0,3	25	28	12,2	0,3	17	20	16	IR 17x20x16	SW 30
	8	20	0,3	25	28	12,2	0,3	17	20	16	IR 17x20x16	SW 30
25	8	25	0,3	31,6	35	14,2	0,3	20	25	16	IR 20x25x16 IS1	SW 37
	8	25	0,3	31,6	35	14,2	0,3	20	25	16	IR 20x25x16 IS1	SW 37
30	10	30	0,3	36,5	40	14,2	0,3	25	30	20	IR 25x30x20	SW 42
	10	30	0,3	36,5	40	14,2	0,3	25	30	20	IR 25x30x20	SW 42
35	10	35	0,3	40,5	45	14,2	0,3	30	35	20	IR 30x35x20	SW 47
	10	35	0,3	40,5	45	14,2	0,3	30	35	20	IR 30x35x20	SW 47

¹⁾ For additional information → Needle roller bearing inner rings, [page 593](#)


²⁾ In accordance with DIN 471, not supplied by SKF

7.9 Needle roller / thrust ball bearings, thrust bearing with a cage


F_w 10 – 70 mm




NKX
($F_w = 10$ mm)



NKX Z
($F_w = 10$ mm)




NKX
($F_w \geq 12$ mm)



NKX Z
($F_w \geq 12$ mm)

Principal dimensions			Basic load ratings				Fatigue load limit		Minimum load factor	Speed ratings		Mass	Designation
F_w	D	C	radial dynamic	static C_0	axial dynamic	static C_0	radial P_u	axial P_u	A	Reference speed	Limiting speed	kg	
mm			kN				kN		–	r/min			–
10	19	23	5,94	8	9,95	15,3	0,9	0,56	0,0012	9 500	8 000	0,036	NKX 10ZTN
	19	23	5,94	8	9,95	15,3	0,9	0,56	0,0012	9 500	13 000	0,034	► NKX 10 TN
12	21	23	9,13	12	10,4	16,6	1,43	0,62	0,0014	9 000	7 500	0,04	► NKX 12 Z
	21	23	9,13	12	10,4	16,6	1,43	0,62	0,0014	9 000	13 000	0,038	NKX 12
15	24	23	11	14	10,6	18,3	1,66	0,67	0,0017	8 500	7 000	0,047	► NKX 15 Z
	24	23	11	14	10,6	18,3	1,66	0,67	0,0017	8 500	12 000	0,044	► NKX 15
17	26	25	12,1	16,6	10,8	19,6	1,96	0,735	0,002	8 500	7 000	0,055	► NKX 17 Z
	26	25	12,1	16,6	10,8	19,6	1,96	0,735	0,002	8 500	12 000	0,053	NKX 17
20	30	30	16,5	25,5	14,3	27	3,05	1	0,0038	7 500	6 000	0,09	► NKX 20 Z
	30	30	16,5	25,5	14,3	27	3,05	1	0,0038	7 500	10 000	0,083	► NKX 20
25	37	30	19	32,5	19,5	40,5	4	1,5	0,0085	6 300	5 500	0,13	► NKX 25 Z
	37	30	19	32,5	19,5	40,5	4	1,5	0,0085	6 300	9 000	0,13	NKX 25
30	42	30	22,9	38	20,3	45,5	4,8	1,7	0,01	6 000	5 000	0,14	► NKX 30 Z
	42	30	22,9	38	20,3	45,5	4,8	1,7	0,01	6 000	8 500	0,14	► NKX 30
35	47	30	24,6	45	21,2	51	5,6	1,9	0,013	5 600	4 500	0,17	► NKX 35 Z
	47	30	24,6	45	21,2	51	5,6	1,9	0,013	5 600	7 500	0,16	► NKX 35
40	52	32	26,4	51	27	68	6,3	2,55	0,024	5 000	4 000	0,21	► NKX 40 Z
	52	32	26,4	51	27	68	6,3	2,55	0,024	5 000	7 000	0,2	NKX 40
45	58	32	27,5	57	28,1	75	7,1	2,8	0,029	4 500	3 800	0,27	► NKX 45 Z
	58	32	27,5	57	28,1	75	7,1	2,8	0,029	4 500	6 300	0,25	NKX 45
50	62	35	38	78	28,6	81,5	9,65	3,05	0,034	4 300	3 600	0,3	► NKX 50 Z
	62	35	38	78	28,6	81,5	9,65	3,05	0,034	4 300	6 300	0,28	► NKX 50
60	72	40	41,8	96,5	41,6	122	11,8	4,55	0,077	3 600	3 000	0,38	► NKX 60 Z
	72	40	41,8	96,5	41,6	122	11,8	4,55	0,077	3 600	5 000	0,36	► NKX 60
70	85	40	44,6	98	43,6	137	12,2	5,1	0,097	3 400	2 700	0,52	► NKX 70 Z
	85	40	44,6	98	43,6	137	12,2	5,1	0,097	3 400	4 500	0,5	► NKX 70

► Popular item

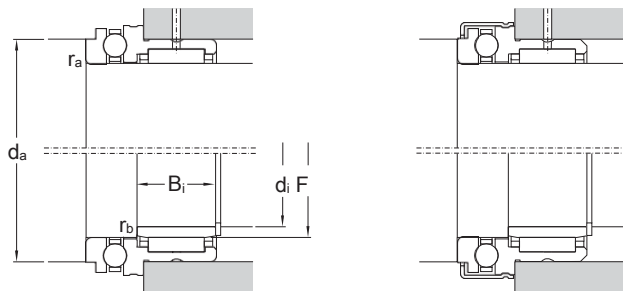


Dimensions						Abutment and fillet dimensions				Associated inner ring ¹⁾			Designation
F _w	C ₁	C ₂	d	D ₁	D ₂	r _{1,2} min	d _a min	r _a max	r _b max	d _i	F	B _i	
mm							mm			mm			—
10	9	6,5	10	—	25,2	0,3	19,7	0,3	0,3	7	10	16	IR 7x10x16
	9	6,5	10	24,1	—	0,3	19,7	0,3	0,3	7	10	16	IR 7x10x16
12	9	6,5	12	—	27,2	0,3	21,7	0,3	0,3	9	12	16	IR 9x12x16
	9	6,5	12	26,1	—	0,3	21,7	0,3	0,3	9	12	16	IR 9x12x16
15	9	6,5	15	—	29,2	0,3	23,7	0,3	0,3	12	15	16	IR 12x15x16
	9	6,5	15	28,1	—	0,3	23,7	0,3	0,3	12	15	16	IR 12x15x16
17	9	8	17	—	31,2	0,3	25,7	0,3	0,3	14	17	17	IR 14x17x17
	9	8	17	30,1	—	0,3	25,7	0,3	0,3	14	17	17	IR 14x17x17
20	10	10,5	20	—	36,2	0,3	30,7	0,3	0,3	17	20	20	IR 17x20x20
	10	10,5	20	35,1	—	0,3	30,7	0,3	0,3	17	20	20	IR 17x20x20
25	11	9,5	25	—	43,2	0,6	37,7	0,6	0,3	20	25	20	IR 20x25x20
	11	9,5	25	42,1	—	0,6	37,7	0,6	0,3	20	25	20	IR 20x25x20
30	11	9,5	30	—	48,2	0,6	42,7	0,6	0,3	25	30	20	IR 25x30x20
	11	9,5	30	47,1	—	0,6	42,7	0,6	0,3	25	30	20	IR 25x30x20
35	12	9	35	—	53,2	0,6	47,7	0,6	0,3	30	35	20	IR 30x35x20
	12	9	35	52,1	—	0,6	47,7	0,6	0,3	30	35	20	IR 30x35x20
40	13	10	40	—	61,2	0,6	55,7	0,6	0,3	35	40	20	IR 35x40x20
	13	10	40	60,1	—	0,6	55,7	0,6	0,3	35	40	20	IR 35x40x20
45	14	9	45	—	66,5	0,6	60,5	0,6	0,3	40	45	20	IR 40x45x20
	14	9	45	65,2	—	0,6	60,5	0,6	0,3	40	45	20	IR 40x45x20
50	14	10	50	—	71,5	0,6	65,5	0,6	0,6	45	50	25	IR 45x50x25
	14	10	50	70,2	—	0,6	65,5	0,6	0,6	45	50	25	IR 45x50x25
60	17	12	60	—	86,5	1	80,5	1	1	50	60	25	IR 50x60x25
	17	12	60	85,2	—	1	80,5	1	1	50	60	25	IR 50x60x25
70	18	11	70	—	96,5	1	90,5	1	1	60	70	25	IR 60x70x25
	18	11	70	95,2	—	1	90,5	1	1	60	70	25	IR 60x70x25

¹⁾ For additional information → Needle roller bearing inner rings, [page 593](#)

7.10 Needle roller / cylindrical roller thrust bearings

F_w 15 – 50 mm

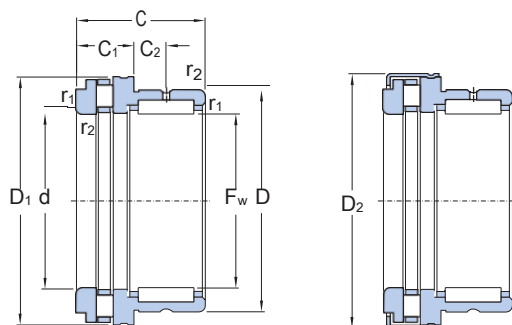


NKXR

NKXR Z

Principal dimensions			Basic load ratings				Fatigue load limit		Minimum load factor	Speed ratings		Mass	Designation
F _w	D	C	radial dynamic C	static C ₀	axial dynamic C	static C ₀	radial P _U	axial P _U	A	Reference speed	Limiting speed	kg	
mm			kN				kN		–	r/min			–
15	24	23	11	14	11,2	27	1,66	2,45	0,000 058	4 300	8 500	0,042	NKXR 15
	24	23	11	14	11,2	27	1,66	2,45	0,000 058	4 300	8 500	0,045	► NKXR 15 Z
17	26	25	12,1	16,6	12,2	31,5	1,96	2,85	0,000 079	4 300	8 500	0,05	► NKXR 17
	26	25	12,1	16,6	12,2	31,5	1,96	2,85	0,000 079	4 300	8 500	0,053	► NKXR 17 Z
20	30	30	16,5	25,5	18,6	48	3,05	4,65	0,00018	3 800	7 500	0,08	► NKXR 20
	30	30	16,5	25,5	18,6	48	3,05	4,65	0,00018	3 800	7 500	0,084	► NKXR 20 Z
25	37	30	19	32,5	25	69,5	4	6,8	0,00039	3 200	6 300	0,12	NKXR 25
	37	30	19	32,5	25	69,5	4	6,8	0,00039	3 200	6 300	0,13	► NKXR 25 Z
30	42	30	22,9	38	27	78	4,8	7,65	0,00049	3 000	6 000	0,14	NKXR 30
	42	30	22,9	38	27	78	4,8	7,65	0,00049	3 000	6 000	0,14	► NKXR 30 Z
35	47	30	24,6	45	29	93	5,6	9,15	0,00069	2 800	5 600	0,16	NKXR 35
	47	30	24,6	45	29	93	5,6	9,15	0,00069	2 800	5 600	0,17	► NKXR 35 Z
40	52	32	26,4	51	43	137	6,3	13,7	0,0015	2 400	5 000	0,2	NKXR 40
	52	32	26,4	51	43	137	6,3	13,7	0,0015	2 400	5 000	0,21	► NKXR 40 Z
45	58	32	27,5	57	45	153	7,1	15,3	0,0019	2 200	4 500	0,24	NKXR 45
	58	32	27,5	57	45	153	7,1	15,3	0,0019	2 200	4 500	0,26	► NKXR 45 Z
50	62	35	38	78	47,5	166	9,65	16,6	0,0022	2 200	4 300	0,27	NKXR 50
	62	35	38	78	47,5	166	9,65	16,6	0,0022	2 200	4 300	0,29	► NKXR 50 Z

► Popular item

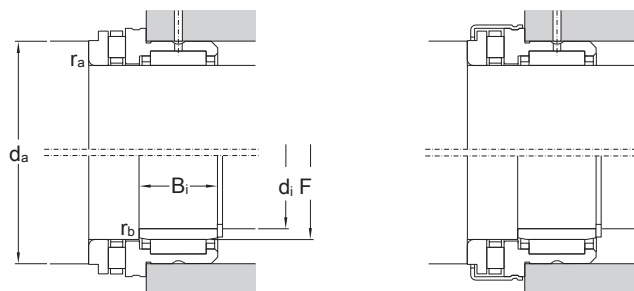


Dimensions							Abutment and fillet dimensions			Associated inner ring ¹⁾			Designation
F _w	C ₁	C ₂	d	D ₁	D ₂	r _{1,2} min	d _a min	r _a max	r _b max	d _i	F	B _i	
mm							mm			mm			–
15	9	6,5	15	28,1	–	0,3	23,7	0,3	0,3	12	15	16	IR 12x15x16
	9	6,5	15	–	29,2	0,3	23,7	0,3	0,3	12	15	16	IR 12x15x16
17	9	8	17	30,1	–	0,3	25,7	0,3	0,3	14	17	17	IR 14x17x17
	9	8	17	–	31,2	0,3	25,7	0,3	0,3	14	17	17	IR 14x17x17
20	10	10,5	20	35,1	–	0,3	30,7	0,3	0,3	17	20	20	IR 17x20x20
	10	10,5	20	–	36,2	0,3	30,7	0,3	0,3	17	20	20	IR 17x20x20
25	11	9,5	25	42,1	–	0,6	37,7	0,6	0,3	20	25	20	IR 20x25x20
	11	9,5	25	–	43,2	0,6	37,7	0,6	0,3	20	25	20	IR 20x25x20
30	11	9,5	30	47,1	–	0,6	42,7	0,6	0,3	25	30	20	IR 25x30x20
	11	9,5	30	–	48,2	0,6	42,7	0,6	0,3	25	30	20	IR 25x30x20
35	12	9	35	52,1	–	0,6	47,7	0,6	0,3	30	35	20	IR 30x35x20
	12	9	35	–	53,2	0,6	47,7	0,6	0,3	30	35	20	IR 30x35x20
40	13	10	40	60,1	–	0,6	55,7	0,6	0,3	35	40	20	IR 35x40x20
	13	10	40	–	61,2	0,6	55,7	0,6	0,3	35	40	20	IR 35x40x20
45	14	9	45	65,2	–	0,6	60,6	0,6	0,3	40	45	20	IR 40x45x20
	14	9	45	–	66,5	0,6	60,6	0,6	0,3	40	45	20	IR 40x45x20
50	14	10	50	70,2	–	0,6	65,5	0,6	0,6	45	50	25	IR 45x50x25
	14	10	50	–	71,5	0,6	65,5	0,6	0,6	45	50	25	IR 45x50x25

¹⁾ For additional information → Needle roller bearing inner rings, [page 593](#)

7.11 Needle roller bearing inner rings

d 5 – 75 mm

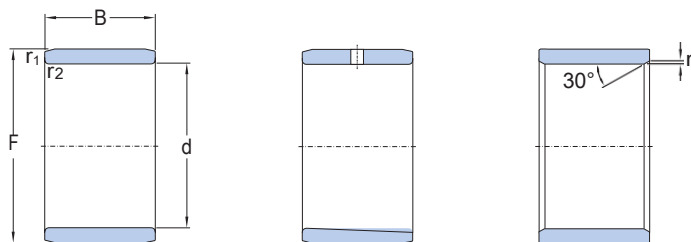

IR

IR IS1

LR


IR						LR					
Dimensions				Mass	Designation	Dimensions				Mass	Designation
d	F	B	r, r _{1,2} min			d	F	B	r, r _{1,2} min		
mm				kg	–	mm				kg	–
5	8	12	0,3	0,0028	IR 5x8x12	15	18	12,5	0,3	0,0072	LR 15x18x12.5
	8	16	0,3	0,0037	IR 5x8x16		18	16	0,3	0,0094	IR 15x18x16
6	9	12	0,3	0,003	► IR 6x9x12		18	16,5	0,3	0,0098	IR 15x18x16.5
	9	16	0,3	0,0043	IR 6x9x16		19	16	0,3	0,013	IR 15x19x16
7	10	10,5	0,3	0,0031	► IR 7x10x10.5		19	20	0,3	0,016	IR 15x19x20
	10	10,5	0,3	0,0031	LR 7x10x10.5		20	13	0,3	0,014	IR 15x20x13
	10	12	0,3	0,0036	► IR 7x10x12	17	20	23	0,3	0,024	IR 15x20x23
	10	16	0,3	0,0049	IR 7x10x16		20	16	0,3	0,011	► IR 17x20x16
8	12	10	0,3	0,0048	► IR 8x12x10 IS1		20	16,5	0,3	0,011	► IR 17x20x16.5
	12	10,5	0,3	0,005	IR 8x12x10.5		20	16,5	0,3	0,011	LR 17x20x16.5
	12	10,5	0,3	0,005	LR 8x12x10.5		20	20	0,3	0,014	► IR 17x20x20
	12	12,5	0,3	0,0059	► IR 8x12x12.5		20	20,5	0,3	0,014	► IR 17x20x20.5
	12	12,5	0,3	0,0059	LR 8x12x12.5		20	20,5	0,3	0,014	LR 17x20x20.5
9	12	12	0,3	0,0044	IR 9x12x12		20	30,5	0,3	0,021	► IR 17x20x30.5
	12	16	0,3	0,006	IR 9x12x16		20	30,5	0,3	0,021	LR 17x20x30.5
10	13	12,5	0,3	0,0052	► IR 10x13x12.5		22	13	0,3	0,015	► IR 17x22x13
	13	12,5	0,3	0,0052	LR 10x13x12.5		22	16	0,3	0,018	► IR 17x22x16
	14	13	0,3	0,0074	IR 10x14x13		22	23	0,3	0,027	► IR 17x22x23
	14	16	0,3	0,0092	► IR 10x14x16		24	20	0,6	0,034	► IR 17x24x20
12	14	20	0,3	0,012	IR 10x14x20	20	24	16	0,3	0,015	IR 20x24x16
	15	12	0,3	0,0057	IR 12x15x12		24	20	0,3	0,021	► IR 20x24x20
	15	12,5	0,3	0,0061	► IR 12x15x12.5		25	12,5	0,3	0,016	LR 20x25x12.5
	15	12,5	0,3	0,0061	LR 12x15x12.5		25	16,5	0,3	0,022	LR 20x25x16.5
	15	16	0,3	0,0076	► IR 12x15x16		25	17	0,3	0,025	IR 20x25x17
	15	16,5	0,3	0,0081	IR 12x15x16.5		25	20	0,3	0,028	► IR 20x25x20
	15	22,5	0,3	0,011	IR 12x15x22.5		25	20,5	0,3	0,027	► IR 20x25x20.5
	15	22,5	0,3	0,011	LR 12x15x22.5		25	20,5	0,3	0,027	LR 20x25x20.5
	16	13	0,3	0,0085	► IR 12x16x13		25	26,5	0,3	0,038	► IR 20x25x26.5
	16	16	0,3	0,011	IR 12x16x16		25	26,5	0,3	0,038	LR 20x25x26.5
	16	20	0,3	0,014	► IR 12x16x20		25	30	0,3	0,04	► IR 20x25x30
	16	22	0,3	0,015	IR 12x16x22		25	38,5	0,3	0,053	► IR 20x25x38.5
14	17	17	0,3	0,0095	► IR 14x17x17		28	20	0,6	0,045	IR 20x28x20

► Popular item

Dimensions					Mass	Designation	Dimensions					Mass	Designation
d	F	B	r, r _{1,2} min				d	F	B	r, r _{1,2} min			
mm					kg	–	mm					kg	–
22	26	16	0,3		0,018	IR 22x26x16	40	45	16,5	0,3		0,041	LR 40x45x16.5
	26	20	0,3		0,023	IR 22x26x20		45	17	0,3		0,043	IR 40x45x17
	28	17	0,3		0,03	► IR 22x28x17		45	20	0,3		0,049	► IR 40x45x20
	28	20	0,3		0,035	IR 22x28x20		45	20,5	0,3		0,052	IR 40x45x20.5
	28	20,5	0,3		0,036	IR 22x28x20.5		45	20,5	0,3		0,052	LR 40x45x20.5
	28	30	0,3		0,054	IR 22x28x30		45	30	0,3		0,084	► IR 40x45x30
25	29	20	0,3		0,026	IR 25x29x20		48	22	0,6		0,092	► IR 40x48x22
	29	30	0,3		0,039	IR 25x29x30		48	40	0,6		0,17	► IR 40x48x40
	30	12,5	0,3		0,02	► LR 25x30x12.5		50	22	1		0,12	IR 40x50x22
	30	16,5	0,3		0,027	LR 25x30x16.5	42	47	20	0,3		0,053	IR 42x47x20
	30	17	0,3		0,027	► IR 25x30x17		47	30	0,3		0,081	IR 42x47x30
	30	20	0,3		0,033	► IR 25x30x20	45	50	20,5	0,3		0,059	LR 45x50x20.5
	30	20,5	0,3		0,033	► IR 25x30x20.5		50	25	0,6		0,071	► IR 45x50x25
	30	20,5	0,3		0,033	LR 25x30x20.5		50	25,5	0,3		0,075	IR 45x50x25.5
	30	26,5	0,3		0,046	► IR 25x30x26.5		50	25,5	0,3		0,075	LR 45x50x25.5
	30	26,5	0,3		0,046	LR 25x30x26.5		50	35	0,6		0,1	► IR 45x50x35
	30	30	0,3		0,053	► IR 25x30x30		52	22	0,6		0,089	► IR 45x52x22
	30	32	0,3		0,056	IR 25x30x32		52	40	0,6		0,16	IR 45x52x40
	30	38,5	0,3		0,065	► IR 25x30x38.5		55	22	1		0,13	► IR 45x55x22
	30	38,5	0,3		0,065	LR 25x30x38.5	50	55	20,5	0,6		0,064	LR 50x55x20.5
	32	22	0,6		0,053	IR 25x32x22		55	25	0,6		0,078	► IR 50x55x25
								55	35	0,6		0,11	► IR 50x55x35
								58	22	0,6		0,12	IR 50x58x22
28	32	17	0,3		0,025	IR 28x32x17		58	40	0,6		0,21	IR 50x58x40
	32	20	0,3		0,029	IR 28x32x20		60	25	1		0,16	► IR 50x60x25
	32	30	0,3		0,044	IR 28x32x30		60	28	1,1		0,18	IR 50x60x28
30	35	12,5	0,3		0,023	LR 30x35x12.5		60	25	0,6		0,086	► IR 55x60x25
	35	13	0,3		0,025	► IR 30x35x13		60	35	0,6		0,12	► IR 55x60x35
	35	16	0,3		0,034	IR 30x35x16		63	25	1		0,14	IR 55x63x25
	35	17	0,3		0,036	► IR 30x35x17		63	45	1		0,26	IR 55x63x45
	35	20	0,3		0,039	► IR 30x35x20	55	65	28	1,1		0,2	► IR 55x65x28
	35	20,5	0,3		0,04	IR 30x35x20.5		68	25	1		0,15	IR 60x68x25
	35	20,5	0,3		0,04	LR 30x35x20.5		68	35	0,6		0,21	► IR 60x68x35
	35	26	0,3		0,05	► IR 30x35x26	60	68	45	1		0,28	► IR 60x68x45
	35	30	0,3		0,059	► IR 30x35x30		70	25	1		0,2	► IR 60x70x25
	37	22	0,6		0,062	IR 30x37x22		70	28	1,1		0,22	► IR 60x70x28
32	37	20	0,3		0,042	IR 32x37x20	65	72	25	1		0,14	► IR 65x72x25
	37	30	0,3		0,062	► IR 32x37x30		72	45	1		0,26	IR 65x72x45
	40	20	0,6		0,068	IR 32x40x20		73	35	1		0,23	IR 65x73x35
	40	36	0,6		0,12	► IR 32x40x36	70	75	28	1,1		0,23	► IR 65x75x28
35	40	12,5	0,3		0,027	LR 35x40x12.5		80	25	1		0,22	► IR 70x80x25
	40	16,5	0,3		0,037	LR 35x40x16.5		80	30	1		0,27	IR 70x80x30
	40	17	0,3		0,038	IR 35x40x17		80	35	1		0,31	► IR 70x80x35
	40	20	0,3		0,044	► IR 35x40x20		80	54	1		0,49	► IR 70x80x54
	40	20,5	0,3		0,046	► IR 35x40x20.5	75	85	25	1		0,24	IR 75x85x25
	40	20,5	0,3		0,046	LR 35x40x20.5		85	35	1		0,34	► IR 75x85x35
	40	30	0,3		0,067	► IR 35x40x30		85	54	1		0,53	► IR 75x85x54
	42	36	0,6		0,12	► IR 35x42x36							
	43	22	0,6		0,082	IR 35x43x22							
38	43	20	0,3		0,048	IR 38x43x20							
	► Popular 43	30	0,3		0,074	IR 38x43x30							

7.11 Needle roller bearing inner rings

d 80 – 240 mm



Dimensions				Mass	Designation
d	F	B	r, r _{1,2} min		
mm				kg	–
80	90	25	1	0,25	► IR 80x90x25
	90	30	1	0,3	► IR 80x90x30
	90	35	1	0,36	► IR 80x90x35
	90	54	1	0,56	► IR 80x90x54
85	95	26	1	0,28	► IR 85x95x26
	95	36	1	0,39	IR 85x95x36
	100	35	1,1	0,58	► IR 85x100x35
	100	63	1,1	1,05	IR 85x100x63
90	100	26	1	0,29	► IR 90x100x26
	100	30	1	0,34	IR 90x100x30
	100	36	1	0,41	► IR 90x100x36
	105	35	1,1	0,61	► IR 90x105x35
95	105	26	1	0,31	IR 95x105x26
100	110	40	1,1	0,51	► IR 100x110x40
	115	40	1,1	0,8	► IR 100x115x40
110	120	30	1	0,41	► IR 110x120x30
	125	40	1,1	0,84	► IR 110x125x40
120	130	30	1	0,44	► IR 120x130x30
	135	45	1,1	1,05	► IR 120x135x45
130	145	35	1,1	0,86	► IR 130x145x35
	150	50	1,5	1,7	► IR 130x150x50
140	155	35	1,1	0,92	► IR 140x155x35
	160	50	1,5	1,8	► IR 140x160x50
150	165	40	1,1	1,1	► IR 150x165x40
160	175	40	1,1	1,2	► IR 160x175x40
170	185	45	1,1	1,45	► IR 170x185x45
180	195	45	1,1	1,5	► IR 180x195x45
190	210	50	1,5	2,4	► IR 190x210x50

Dimensions				Mass	Designation
d	F	B	r, r _{1,2} min		
mm				kg	–
200	220	50	1,5	2,5	► IR 200x220x50
220	240	50	1,5	2,75	► IR 220x240x50
240	265	60	2	4,6	IR 240x265x60

► Popular item